

PLANS AND DOCUMENTS
referred to in the PDA
DEVELOPMENT APPROVAL

Approval no: DEV2012/402/122
Date: 14 January 2020



Plan of Development Table

	Terrace Allotments		Ascot Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Courtyard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential Allotment (MR)	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front/Primary Frontage	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	4.5m	4.5m	4.5m	4.5m	3.0m	3.0m
Garage	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a
Rear	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m
Built to Boundary	0.0m	0.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a	n/a	n/a	n/a	n/a
Maximum BTB Wall Length (% of boundary length)	75%	0.9m	65%	1.0m	70%	1.0m	65%	1.0m	65%	1.0m	60%	1.0m	n/a	n/a	n/a	n/a	n/a	n/a
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	0.9m	0.9m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.0m	1.5m	
Corner Lots - Secondary Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m	
Laneway Lots																		
Rear of Lot (from laneway boundary including garage)	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a	n/a	n/a	n/a
Site Cover	75%		60%		60%		60%		60%		60%		60%		60%		75%	

Note: Setbacks apply as per lot coding colour




- Notes:**
- General**
- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
 - The maximum height of buildings shall not exceed two (2) storeys.
 - Maximum building location envelopes are subject to future proposed easements and/or other underground services.
 - All lots subject to an acoustic assessment to determine level of acoustic treatments.
 - Buildings shall be constructed in accordance with Bushfire AS3859.
 - Secondary dwellings are not permitted on lots less than 400m².
 - All lots (excluding multiple residential allotments) must contain a house.
- Setbacks**
- Setbacks are as per the Plan of Development Table unless otherwise dimensioned. If a lot is not developed for a Multiple Residential (MR) site, then the equivalent size detached lot setbacks will apply.
 - The location of the built to boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
 - Boundary setbacks are measured to the wall of the structure.
 - Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
 - Eaves cannot encroach farther than where buildings are built to boundary, closer than 450mm to the lot boundary.
 - Buildings to be sited in accordance with the 'Special Siting Requirements for Corner Allotments'.

- Private Open Space**
- Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof).
 - Private open space must be directly accessible from a living space.
- On-site car parking and driveways**
- On-site car parking is to be provided in accordance with the following minimum requirements:
 - For lots up to 12.40 metres wide - 1 covered space per dwelling.
 - For Ascot Allotments - 2 spaces per dwelling, one of which must be capable of being covered.
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling.
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered).
 - Garages for any single storey dwelling on a Lot between 10.0m and 12.40m in width must adhere to the following design criteria:
 - The front facing building wall, which comprises the garage door, must not exceed an external width of 5.7m.
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectional, tilt or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:
 - A front entrance door with glass inserts and / or windows or with a sideglight where the front door is solid. If the front facade includes a habitable room with window, a sideglight is not required.
 - A front verandah, portico or porch located over the front entrance, which extends a minimum of 1600mm forward of the entrance door.
 - The verandah, portico or porch is to include front piers with distinct materials and/or colours.
 - Driveways cannot exceed 3.0m across the verge on Lots between 10.0m and 12.40m wide.
 - Double car garages are permitted on any double storey dwelling or laneway dwelling built on a Lot between 10.0m and 12.40m.
 - Driveways are to accord with Logan City Council's (LCC) standards. Prior to construction, approval from LCC for Vehicular Access to Residential Premises is required.
 - The maximum width of a driveway at the lot boundary shall be 4.8 metres for a lot with a double car width garage and 3.0 metres for a lot with a single car width garage.
 - Garages and carports accessed from a Laneway must be built setback 0.9 metres from the boundary. Ingress/egress must be achieved for a 899 Vehicle.
 - Maximum of one driveway per dwelling unless it is a MR lot.
 - Minimum distance of a driveway from an intersection of one street with another street is 6.0 metres. The Driveway must be laid at the grade of the adjacent verge area. No grade changes to the verge the driveway will be allowed.
 - Where there is a footpath within the verge, the footpath should be cut 30cm at the nearest joint and the footpath reinstated to the driveway without compromising the structural integrity of the footpath.
 - Driveways must be completed prior to occupation of the dwelling.

- Fencing on corner lots is to be designed as front fences addressing both streets (rather than a front and a side fence).
 - Notwithstanding the above, solid front fences and walls may be 1.8 metres in height if the dwelling has a frontage to a street with traffic volumes in excess of, or projected to exceed, 10,000 vehicles per day.
 - Retaining walls must not exceed more than 1.0 metres where fronted to a public street or park. Retaining walls to side and rear boundaries (which are not adjoining a public street or park) can be up to 2.0 metres. Retaining in excess of this must use terraced retaining. No timber retaining walls over 1.0m of adjoining parks or public streets.
 - Walls over 1.0m require RPEQ certification.
- Building Articulation**
- All buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines
 - Window hoods, and/or
 - Use of multiple cladding materials
 Buildings that do not comply may be assessed on architectural merit when accompanied by a report from a Registered Architect
 - Carports and garages are to be compatible with the main building design in terms of height, roof form, detailing, materials and colours.
 - All building materials must be suitably coloured, stained or painted, including retaining, fences, walls and roofs. Untreated materials, such as zinc coated steel, bare metal, concrete block or masonry panels are not permitted.
 - Air-conditioners, gas bottles, hot water systems, clothes lines and other household services must be screened and/or located to minimise visual impact to public streets or parks.
 - Homes must include a clearly identifiable and addressed front door and undercover point of entry.
 - Screened drying and rubbish bins area must be behind the main face of the dwelling.
 - At least two openings to all habitable rooms to facilitate cross flow ventilation are required.
- Slope and Building Footings**
- Buildings on sloping sites, must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.
 - If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent block using the as constructed levels.

- Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.
- Additional Criteria for Multiple Residential Allotments**
- Buildings must address all street frontages with driveways, pedestrian entries or both.
 - All dwellings must have a clearly identifiable front door, which is undercover.
 - Have drying and rubbish bin areas behind the main face of the dwelling or suitably screened from public streets and park frontages.
 - Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.
- Additional Criteria for Secondary Dwellings**
- Floor area must be between a minimum of 30m² and 75m².
 - Materials, detailing, colours and roof form are consistent with those of the primary house.
 - Outdoor living space must measure a minimum of 9m² with a minimum dimension in any direction of 3 metres.
 - Outdoor living space must be directly accessible from the main living space and can be combined with the primary dwelling outdoor space.
 - Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
 - A minimum of one (1) x 3m car parking space must be provided for the secondary dwelling, in addition to parking for the primary dwelling.
 - The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 3 metres and a maximum width of 5 metres.
 - Corner allotments must provide dedicated pedestrian entry and a visible door from and addressing the secondary street to the secondary dwelling.
 - Corner allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.

- Special Siting Requirements for Corner Allotments**
-
- Building erected by Peat must not be altered, modified or removed without prior written approval from Peat.
 - Fencing on all park or street frontages has a maximum height of 1.2metres where solid or have a maximum height of 1.8 metres where containing openings that make the fence more than 50% transparent.
 - Fencing on all park or street frontages is constructed with visible posts, which are at least 120mm x 120mm and 100mm higher than the infill panels or panels.
 - Fencing on lanes can be screen fencing at 1.8m high where along private open space, carparking and service areas.

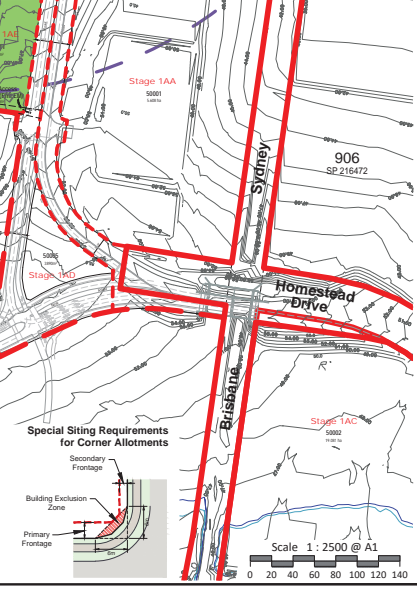

REVISION

2: 06/05/19 Amend Sub-Staging and RRP Lot
 1A: 17/05/19 Amend Stage 1A
 AR: 06/09/19 Amend Stage 1A, 1B, 1C, 1AAB, 1AC & 1AF
 AC: 24/11/19 Sub-Staging & RRP Lot
 AE: 20/03/19 POD Amendments & ERM EM
 AE: 18/06/19 Amend Stage 1H, 1I, 1R, 1S
 AF: 03/08/19 POD Control Amendments
 AG: 18/12/19 POD Amendments Stage 1P
 1R, 1S and 1T

Note:
 All dimensions and areas are approximate only, and are subject to survey and Council approval. Dimensions have been rounded to the nearest 0.1 metres.
 Areas have been rounded down to the nearest 5m².
 The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
 Site boundaries: Registered Survey Plans.
 Adjoining information: DCCB.
 Contours: Carudo Bulk Earthworks

Legend

- Site Boundary
- Proposed Precinct Boundary
- Proposed Stage Boundary
- Proposed Sub-Stage Boundary
- Entry Statements - Lease
- Retained Vegetation - Flagstone & Sandy Creek
- Retained Vegetation - Other Areas
- 400m Catchment Area
- Possible Multiple Residential Allotment (Max. no. of dwellings)
- Indicative In-line Bus Stop
- Padmount Transformer
- Allotment Details
- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Mandatory Built to Boundary Wall
- Nominal Built to Boundary Wall
- No Vehicle Access
- Primary Frontage
- Preferred Garage Location
- Letterbox Location for Primary Dwelling (on a laneway)
- Solid Fence to be Constructed by Developer

CLIENT
PEET

PROJECT
 FLAGSTONE
 PRECINCT 1

PLAN OF DEVELOPMENT
 STAGE 1
 RESIDENTIAL LOTS

Date: 16 December 2019
 Comp By: WNW
 Checked By: MD / DG
 DWG Name: Precinct 1 Stage 1
 Job Reference: 110056
 Local Authority: ECONOMIC DEVELOPMENT QUEENSLAND
 Locality: JIMBOOMBA

Scale: 1 : 2500 Sheet: A1
 Plan Ref: 110056 - 129 Rev: AG

RPS

RPS Australia East Pty Ltd
 ADN 140 292 762
 ABN 44 140 292 762
 Urban Design
 Level 4 office
 520 Wickham Street
 Fortitude Valley QLD 4006
 T 417 3539 9500
 W rpsgroup.com.au

Scale 1 : 2500 @ A1
 0 20 40 60 80 100 120 140

Notes:

General

- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
- The maximum height of buildings shall not exceed two (2) storeys.
- Maximum building location envelopes are subject to future proposed easements and/or other underground services.
- All lots subject to an acoustic assessment to determine level of acoustic treatments.
- Buildings shall be constructed in accordance with Bushfire AS3959.
- Secondary dwellings are not permitted on lots less than 400m².
- All lots (excluding multiple residential allotments) must contain a house.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise dimensioned. If a lot is not developed for a Multiple Residential (MR) site, then the equivalent size detached lot setbacks will apply.
- The location of the built to boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted site setbacks shall be in accordance with the Plan of Development Table.
- Boundary setbacks are measured to the wall of the structure.
- Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
- Eaves cannot encroach (other than where buildings are built to boundary) closer than 450mm to the lot boundary.
- Buildings to be sited in accordance with the 'Special Siting Requirements for Corner Allotments'.

Private Open Space

- Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof).
- Private open space must be directly accessible from a living space.

On-site car parking and driveways

- On-site car parking is to be provided in accordance with the following minimum requirements:
 - For lots up to 12.49 metres wide - 1 covered space per dwelling;
 - For Ascot Allotments - 2 spaces per dwelling, one of which must be capable of being covered;
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling;
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered);
- Garages for any single storey dwelling on a Lot between 10.0m and 12.49m in width must adhere to the following design criteria:
 - The front facing building wall, which comprises the garage door, must not exceed an external width of 4.7m.
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectional, tilt or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:
 - A front entrance door with glass inserts and / or windows or with a sidelight where the front door is solid. If the front facade includes a habitable room with window, a sidelight is not required.
 - A front verandah, portico or porch located over the front entrance, which extends a minimum of 1600mm forward of the entrance door
 - The verandah, portico or porch is to include front steps with distinct materials and/or colours.
- Driveways cannot exceed 3.0m across the verge on lots between 10.0m and 12.49m wide.
- Double car garages are permitted on any double storey dwelling or laneway dwelling built on a lot between 10.0m and 12.49m.
- Driveways are to accord with Logan City Council's (LCC) standards. Prior to construction, approval from LCC for Vehicular Access to Residential Premises is required.
- The maximum width of a driveway at the lot boundary shall be 4.8 metres for a lot with a double car width garage and 3.0 metres for a lot with a single car width garage.
- Garages and carports accessed from a Laneway must be built setback 0.9 metres from the boundary. Ingress/egress must be achieved for a B99 Vehicle.
- Maximum of one driveway per dwelling unless it is a MR lot.
- Minimum distance of a driveway from an intersection of one street with another street is 6.0 metres. The Driveway must be laid at the grade of the adjacent verge area. No grade changes to the verge for the driveway will be allowed.
- Where there is a footpath within the verge, the footpath should be cut at the nearest joint and the footpath reinstated to the driveway without compromising the structural integrity of the footpath.
- Driveways must be completed prior to occupation of the dwelling.

Fencing

- Fencing erected by Peet must not be altered, modified or removed without prior written approval from Peet.
- Fencing on all park or street frontages has a maximum height of 1.2metres where solid or have a maximum height of 1.8 metres where containing openings that make the fence more than 50% transparent.
- Fencing on all park or street frontages is constructed with visible posts, which are at least 120mm x 120mm and 100mm higher than the infill panels or panels.
- Fencing on lanes can be screen fencing at 1.8m high where along private open space, carports and service areas.
- Fencing on corner lots is to be designed as front fences addressing both streets (rather than a front and a side fence).
- Notwithstanding the above, solid front fences and walls may be 1.8 metres in height if the dwelling has a frontage to a street with traffic volumes in excess of, or projected to exceed, 10,000 vehicles per day.
- Retaining walls must not exceed more than 1.0 metres where fronted to a public street or park. Retaining walls to side and rear boundaries (which are not adjoining a public street or park) can be up to 2.0 metres. Retaining in excess of this must use terraced retaining.
- No timber retaining walls over 1.0m or adjoining parks or public streets.
- Walls over 1.0m require RPEQ certification.

Building Articulation

- All buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines
 - Window hoods; and/or
 - Use of different cladding materials
 Buildings that do not comply may be assessed on architectural merit when accompanied by a report from a Registered Architect.
- Carports and garages are to be compatible with the main building design in terms of height, roof form, detailing, materials and colours.
- All building materials must be suitably coloured, stained or painted, including retaining, fences, walls and roofs. Untreated materials, such as zinc coated steel, bare metal, concrete block or masonry panels are not permitted.
- Air-conditioners, gas bottles, hot water systems, clothes lines and other household services must be screened and/or located to minimise visual impact to public streets or parks.
- Homes must include a clearly identifiable and addressed front door and undercover point of entry.
- Screened drying and rubbish bins must be behind the main face of the dwelling.
- At least two openings to all habitable rooms to facilitate cross flow ventilation are required.

Side and Building Footings

- Buildings on sloping sites, must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.
- If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent lot, using the as constructed levels.
- Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.

Additional Criteria for Multiple Residential Allotments

- Buildings must address all street frontages with driveways, pedestrianies or both.
- All dwellings must have a clearly identifiable front door, which is undercover.
- Have drying and rubbish bin areas behind the main face of the dwelling or suitably screen from public streets and park frontages.
- Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.


Additional Criteria for Secondary Dwellings

- Floor area must be between a minimum of 30m² and 75m².
- Materials, detailing, colours and roof form are consistent with those of the primary house.
- Outdoor living space must measure a minimum of 9m² with a minimum dimension in any direction of 3 metres.
- Outdoor living space must be directly accessible from the main living space and can be combined with the primary dwelling outdoor space.
- Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
- A minimum of one (5m x 3m) car parking space must be provided for the secondary dwelling, in addition to parking for the primary dwelling.
- The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 3 metres and a maximum width of 5 metres.
- Corner allotments must provide dedicated pedestrian entry and a viable door from and addressing the secondary street to the secondary dwelling.
- Corner allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.

Definitions

Laneway Allotment - Allotments serviced by a laneway.

Special Siting Requirements for Corner Allotments



PLANS AND DOCUMENTS referred to in the RDA DEVELOPMENT APPROVAL

Approval no: DEP/2012/402/122
Date: 14 January 2020



REVISION

Z: 06/05/18 Amend Sub-Stage and RRP Lot
1A: 17/03/18 Amend Stage 1P & 1AG
AR: 06/09/18 Amend Stage 1V, 1W, 1X, 1Y, 1Z, 1AA & 1AF
AC: 24/03/19 Amend Sub-Stage 1P & 1AG
AD: 20/03/19 POD Amendments & EMI EMI
AE: 18/06/19 Amend Stage 1H, 1I, 1J, 1K, 1L, 1M, 1N, 1O, 1P, 1Q, 1R, 1S, 1T and 1U
AF: 06/08/19 POD Corner Amendments
AG: 18/12/19 POD Amendments Stage 1P, 1R, 1S and 1T

Note:
All dimensions and areas are approximate only, and are subject to survey and Council approval. Dimensions have been rounded to the nearest 0.1 metres. Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.
Source Information:
Site boundaries: Registered Survey Plans.
Adjoining information: DCDB.
Contours: Carcho Bull Earthworks

Legend

- Site Boundary
- Proposed Precinct Boundary
- Proposed Stage Boundary
- Proposed Sub Stage Boundary
- Existing CS
- Existing O100
- Retained Vegetation - Flagstone & Sandy Creek
- Retained Vegetation - Other Areas
- 400m Catchment Area
- Possible Multiple Residential Allotment (Max. no. of dwellings)
- Indicative Inline Bus Stop
- Indicative Bus Stop Location
- Padmount Transformer

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Mandatory Built to Boundary Wall
- Nominal Built to Boundary Wall
- No Vehicle Access
- Primary Frontage
- Preferred Garage Location
- Letterbox Location for Primary Dwelling (on a laneway)

CLIENT

PEET

PROJECT

FLAGSTONE PRECINCT 1

PLAN OF DEVELOPMENT

STAGE 1A - 1D RESIDENTIAL LOTS


Date: 16 December 2019
 Comp By: WNW
 Checked by: MD / DG
 Draw Name: Precinct 1 Stage 1
 Job Reference: 110056
 Local Authority: ECONOMIC DEVELOPMENT QUEENSLAND
 Locality: JIMBOOMBA
 Scale: 1:1000 Sheet: A1
 Plan Ref: 110056 - 130 Rev: AG

RPS

RPS Australia East Pty Ltd
 ACN 610 292 762
 ABN 44 140 292 762
 Urban Design
 Level 4 HQ South
 520 Wickham Street
 5th Floor
 Fortitude Valley QLD 4006
 T +61 7 3539 9500
 W rpsgroup.com.au

	Terrace Allotments		Ascot Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Courtyard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential Allotment (MR)	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front/Primary Frontage	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	4.5m	4.5m	4.5m	2.0m	3.0m
Garage	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a
Rear	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m	
Side - General Lots																		
Built to Boundary	0.0m	0.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a	n/a	n/a	n/a	n/a
Maximum BTS Wall Length (% of boundary length)	75%		65%		70%		65%		65%		60%		n/a	n/a	n/a	n/a	n/a	n/a
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	0.9m	0.9m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.0m	1.5m	
Corner Lots - Secondary Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m	
Laneway Lots																		
Rear of Lot (from laneway boundary including garage)	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.5m	1.0m	1.5m	n/a	n/a	
Site Cover	75%		60%		60%		60%		60%		60%		60%		60%		75%	

Note: Setbacks apply as per lot coding colour



NOTES:

- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
- The maximum height of buildings shall not exceed two (2) storeys.
- Maximum building location envelopes are subject to future proposed easements and/or other underground services.
- All lots subject to an acoustic assessment to determine level of acoustic treatments.
- Buildings shall be constructed in accordance with Bushfire AS3959.
- Secondary dwellings are not permitted on lots less than 400m².
- All lots (excluding multiple residential allotments) must contain a house.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise dimensioned. If a lot is not developed for a Multiple Residential (MR) site, then the equivalent size detached set setbacks will apply.
- The location of the built to boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted site setbacks shall be in accordance with the Plan of Development Table. Boundary setbacks are measured to the wall of the structure.
- Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
- Eaves cannot encroach (other than where buildings are built to boundary) closer than 450mm to the lot boundary.
- Buildings to be sited in accordance with the Special Siting Requirements for Corner Allotments.

Private Open Space

- Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof).
- Private open space must be directly accessible from a living space.

On-site car parking and driveways

- On-site car parking is to be provided in accordance with the following minimum requirements:
 - For lots up to 12.49 metres wide - 1 covered space per dwelling;
 - For Ascot Allotments - 2 spaces per dwelling, one of which must be capable of being covered;
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling;
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered);
- Garages for any single detached dwelling on a Lot between 10.0m and 12.49m in width must adhere to the following design criteria:
 - The front facing building wall, which comprises the garage door, must not exceed an external width of 5.7m
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectorial, tilt or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:
 - A front entrance door with glass inserts and / or windows or with a sidelight where the front door is solid. If the front facade includes a habitable room with window, a sidelight is not required.
 - A front verandah, portico or porch located over the front entrance, which extends a minimum of 1600mm forward of the entrance door.
 - The verandah, portico or porch is to include front piers with distinct materials and/or colours.
 - Driveways cannot exceed 3.0m across the verge on Lots between 10.0m and 12.49m wide.

- Double car garages are permitted on any double storey dwelling or laneway dwelling built on a Lot between 10.0m and 12.49m.
- Driveways are to accord with Logan City Council's (LCC) standards. Prior to construction, approval from LCC for Vehicular Access to Residential Premises is required.
- The maximum width of a driveway at the lot boundary shall be 4.8 metres for a lot with a double car width garage and 3.0 metres for a lot with a single car width garage.
- Garages and carports accessible from a Laneway must be built setback 0.9 metres from the boundary. Ingress/egress must be achieved for a B99 Vehicle.
- Maximum of one driveway per dwelling unless it is a MR lot.
- Minimum distance of a driveway from an intersection of one street with another street is 6.0 metres. The Driveway must be laid at the grade of the adjacent verge area. No grade changes to the verge for the driveway will be allowed.
- Where there is a footpath within the verge, the footpath should be cut at the nearest joint and the footpath reinstated to the driveway without compromising the structural integrity of the footpath.
- Driveways must be completed prior to occupation of the dwelling.

Slope and Building Footings

- Buildings on sloping sites, must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.
- If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent block, using the as constructed levels.
- Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.

Additional Criteria for Multiple Residential Allotments

- Buildings must address all street frontages with driveways, pedestrian entries to both.
- All dwellings must have a clearly identifiable front door, which is undercover.
- Have drying and rubbish bin areas behind the main face of the dwelling or suitably screened from public streets and park frontages.
- Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.

Additional Criteria for Secondary Dwellings

- Floor area must be between a minimum of 30m² and 75m².
- Outdoor living space must measure a minimum of 9m² with a minimum dimension in any direction of 3 metres.
- Outdoor living space must be directly accessible from the main living space and can be combined with the primary dwelling outdoor space.
- Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
- A minimum of one (6m x 3m) car parking space must be provided for the secondary dwelling, in addition to parking for the primary dwelling.
- The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 2 metres and a maximum width of 4 metres.
- Corner allotments must provide dedicated pedestrian entry and a visible door from and addressing the secondary street to the secondary dwelling.
- Corner allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.

Special Siting Requirements for Corner Allotments

- Secondary Footings
- Primary Footings
- Building Exclusion Zone
- Primary Footings


Definitions

Laneway Allotment - Allotments serviced by a laneway.

PLANS AND DOCUMENTS referred to the PDA DEVELOPMENT APPROVAL

Approval no: DEV2012/402/122

Date: 14 January 2023

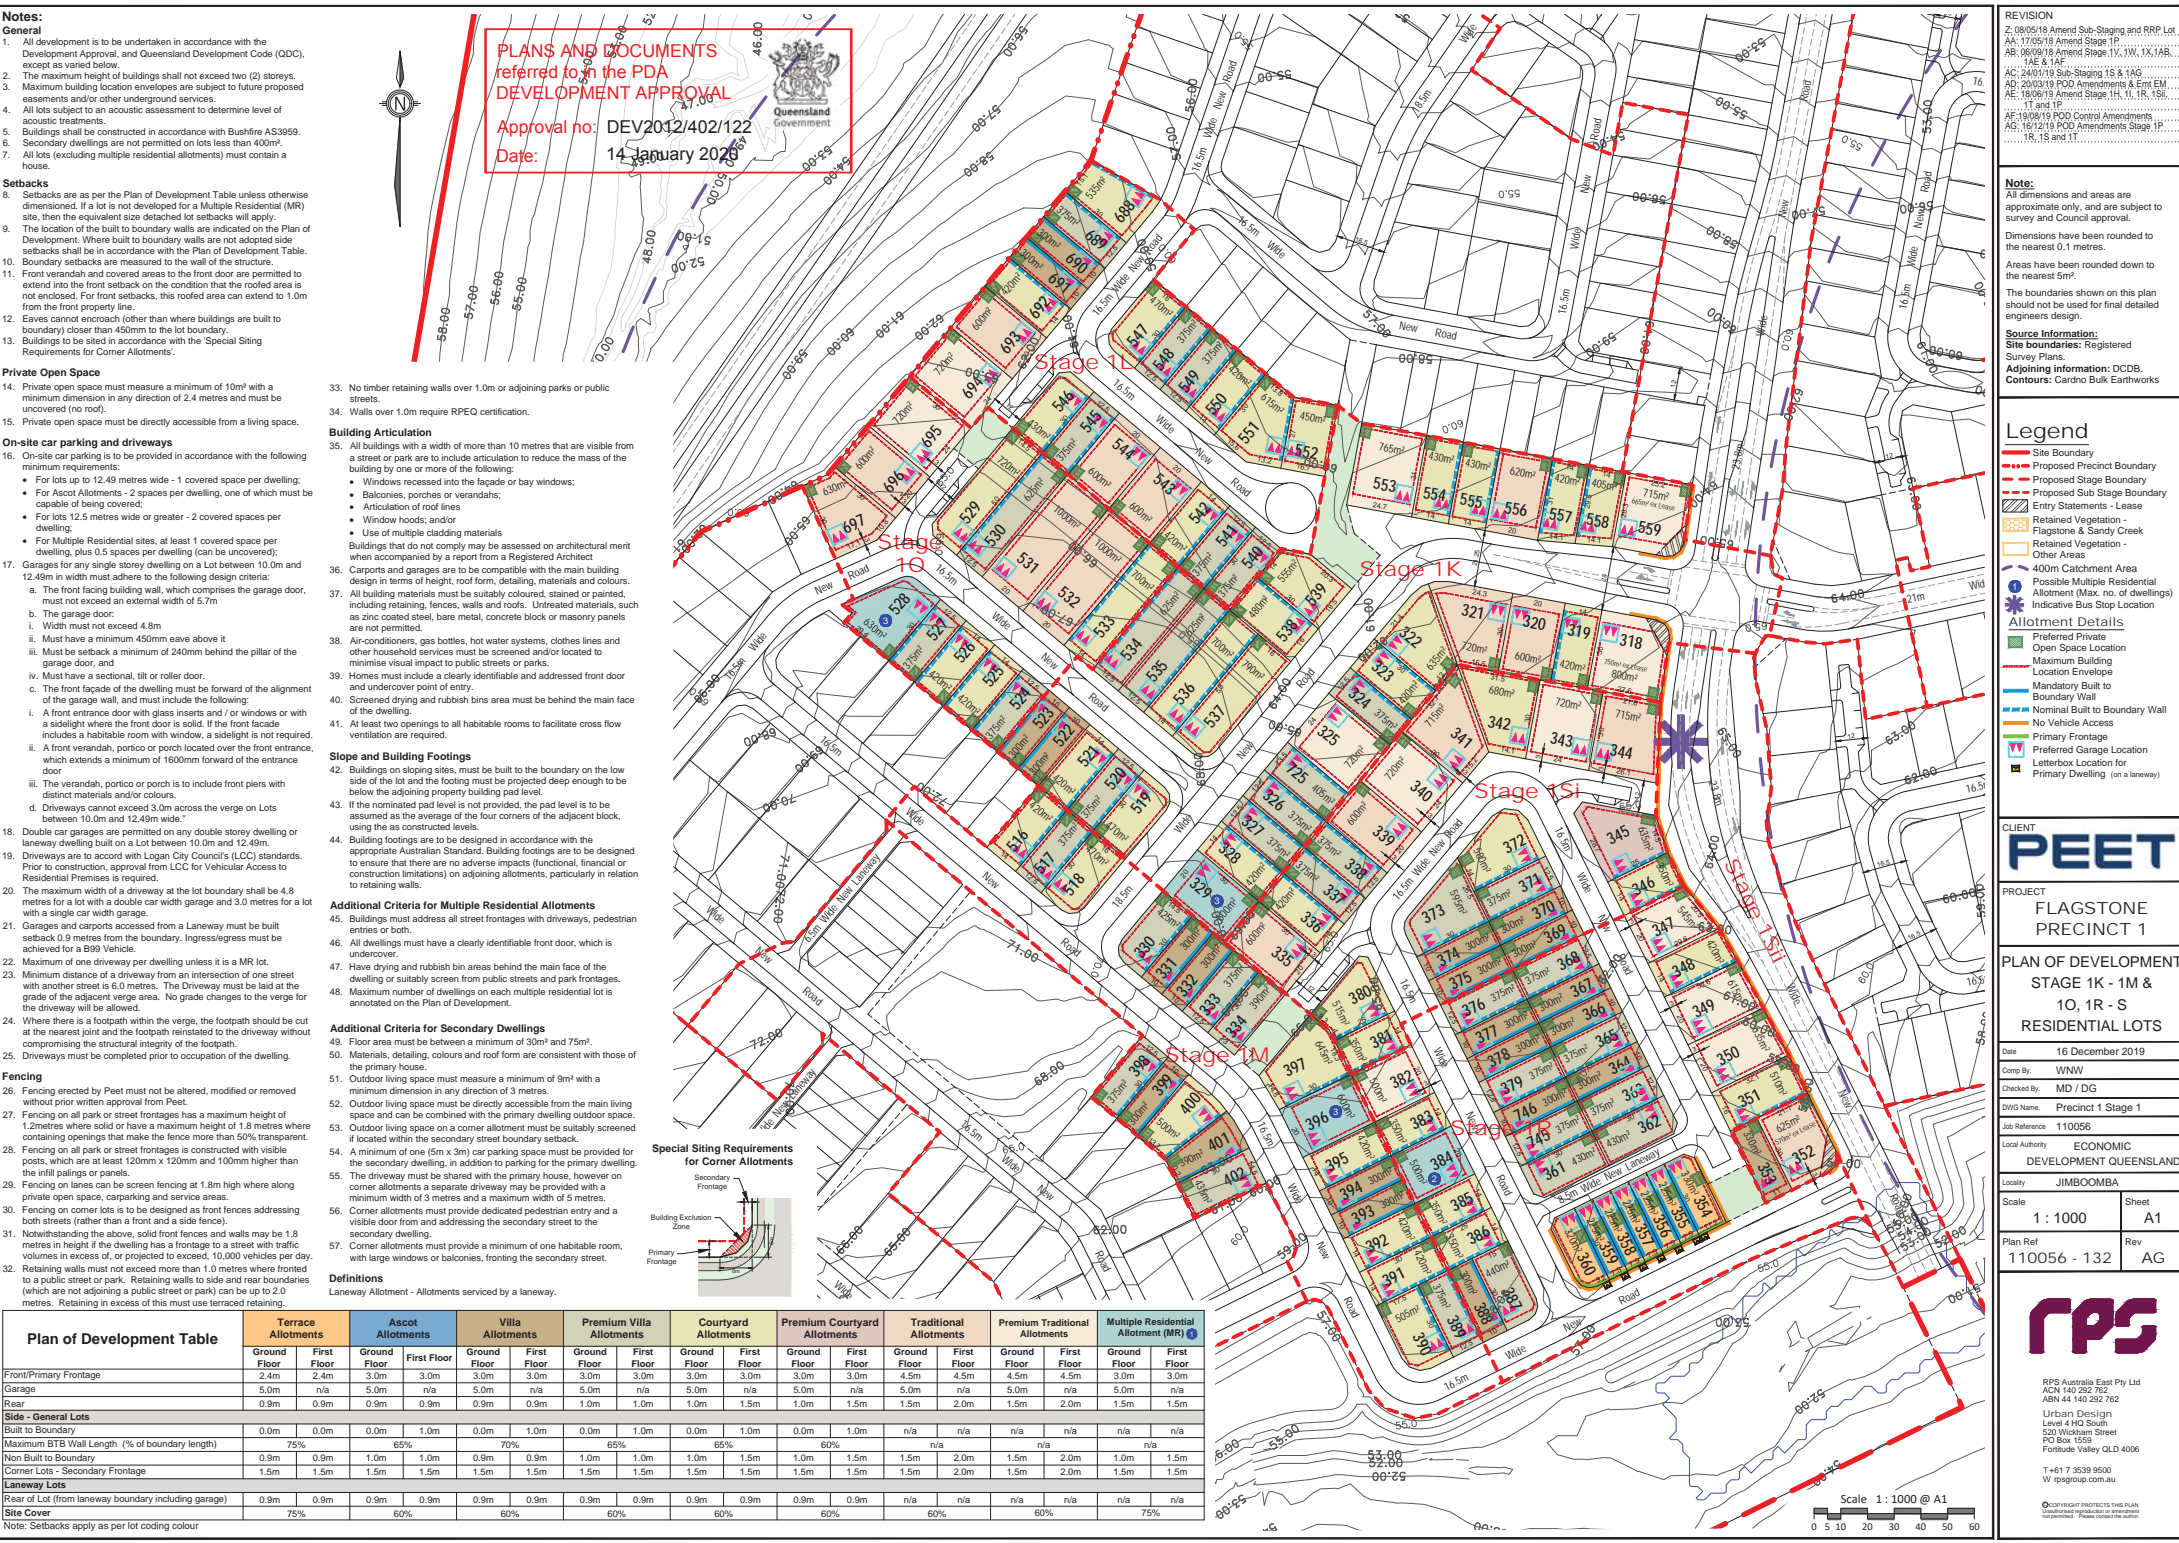

REVISION

Z: 08/05/18 Amend Sub-Staging and RRP Lot
 SA: 17/02/19 Amend Stage 1P
 AR: 06/09/19 Amend Stage 1V, 1W, 1X, 1Y, 1Z
 AE & 1AF
 AC: 20/03/19 Amend Stage 1S & 1AG
 AD: 20/03/19 Amend Stage 1S & 1AG
 AE: 18/06/19 Amend Stage 1H, 1I, 1J, 1K, 1L
 AF: 18/06/19 Amend Stage 1H, 1I, 1J, 1K, 1L
 AG: 18/12/19 Amend Stage 1P
 AH: 18/12/19 Amend Stage 1P
 AI: 18/12/19 Amend Stage 1P

Note:
 All dimensions and areas are approximate only and are subject to survey and Council approval.
 Dimensions have been rounded to the nearest 0.1 metres.
 Areas have been rounded down to the nearest 5m².
 The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Registered Survey Plans
Adjoining information: DCDB
Contours: Carudo Bulk Earthworks

Legend

- Site Boundary
- Proposed Precinct Boundary
- Proposed Stage Boundary
- Proposed Sub Stage Boundary
- Entry Statements - Lease
- Retained Vegetation - Flagstone & Sandy Creek
- Retained Vegetation - Other Areas
- 400m Catchment Area
- Possible Multiple Residential Allotment (Max. no. of dwellings)
- Indicative Bus Stop Location

Allotment Details

- Preferred Privately Open Space Location
- Maximum Building Envelope
- Mandatory Built to Boundary Wall
- Nominal Built to Boundary Wall
- No Vehicle Access
- Primary Footing
- Preferred Garage Location
- Letterbox Location for Primary Dwelling (on a laneway)

CLIENT
PEET

PROJECT
 FLAGSTONE PRECINCT 1

PLAN OF DEVELOPMENT
 STAGE 1K - 1M & 1O, 1R - S
 RESIDENTIAL LOTS

Date: 16 December 2019
 Comp By: WNW
 Checked by: MD / DG
 DWG Name: Precinct 1 Stage 1
 Job Reference: 110056

Local Authority: ECONOMIC DEVELOPMENT QUEENSLAND
 Locality: JIMBOOMBA

Scale: 1 : 1000 Sheet: A1
 Plan Ref: 110056 - 132 Rev: AG


RPS

RPS Australia East Pty Ltd
 ABN 44 140 292 762
 Level 4/40 South
 520 Wickham Street
 PO Box 155
 Fortitude Valley QLD 4006

T 411 7 2539 9500
 W ppsgroup.com.au

Plan of Development Table	Terrace Allotments		Ascot Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Courtyard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential Allotment (MR) 1	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front/Primary Frontage	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a
Rear	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m
Side - General Lots	0.0m	0.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a	n/a	n/a	n/a	n/a
Built to Boundary	0.0m	0.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a	n/a	n/a	n/a	n/a
Maximum BTB Wall Length (% of boundary length)	75%		65%		70%		65%		65%		60%		n/a		n/a		n/a	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.0m	1.5m
Corner Lots - Secondary Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m
Laneway Lots	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a	n/a	n/a	n/a
Rear of Lot (from laneway boundary including garage)	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a	n/a	n/a	n/a
Site Cover	75%		60%		60%		60%		60%		60%		60%		60%		75%	

Note: Setbacks apply as per lot coding colour





PLANS AND DOCUMENTS referred to in the PDA DEVELOPMENT APPROVAL
 Approval no: DEV2012/402/122
 Date: 14 January 2020



- Notes:**
- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
 - The maximum height of buildings shall not exceed two (2) storeys.
 - Maximum building location envelopes are subject to future proposed easements and/or other underground services.
 - All lots subject to an acoustic assessment to determine level of acoustic treatments.
 - Buildings shall be constructed in accordance with Bushfire AS3959.
 - Secondary dwellings are not permitted on lots less than 400m².
 - All lots (excluding multiple residential allotments) must contain a house.
- Setbacks:**
- Setbacks are as per the Plan of Development Table unless otherwise dimensioned. If a lot is not developed for a Multiple Residential (MR) site, then the equivalent size detached lot setbacks will apply.
 - The location of the built to boundary walls are indicated on the Plan of Development. Where built to boundary walls are not adopted site setbacks shall be in accordance with the Plan of Development Table.
 - Boundary setbacks are measured to the wall of the structure.
 - Front verandah and covered areas to the front door are permitted to extend into the front setback on the condition that the roofed area is not enclosed. For front setbacks, this roofed area can extend to 1.0m from the front property line.
 - Eaves cannot encroach (other than where buildings are built to boundary) closer than 450mm to the lot boundary.
 - Buildings to be sited in accordance with the 'Special Siting Requirements for Corner Allotments'.

- Private Open Space**
- Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and must be uncovered (no roof).
 - Private open space must be directly accessible from a living space.
- On-site car parking and driveways**
- On-site car parking is to be provided in accordance with the following minimum requirements:
 - For lots up to 12.49 metres wide - 1 covered space per dwelling;
 - For Ascot Allotments - 2 spaces per dwelling, one of which must be capable of being covered;
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling;
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered);
 - Garages for any single storey dwelling on a Lot between 10.0m and 12.49m in width must adhere to the following design criteria:
 - The front facing building wall, which comprises the garage door, must not exceed an external width of 5.7m
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectional, tilt or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:
 - A front entrance door with glass inserts and /or windows or with a sideglight where the front door is solid. If the front facade includes a habitable room with window, a sideglight is not required.
 - A front verandah, portico or porch located over the front entrance, which extends a minimum of 1600mm forward of the entrance door
 - The verandah, portico or porch is to include front steps with distinct materials and/or colours.
 - Driveways cannot exceed 3.0m across the verge on Lots between 10.0m and 12.49m wide.
 - Double car garages are permitted on any double storey dwelling or laneway dwelling built on a Lot between 10.0m and 12.49m.
 - Driveways are to be constructed in accordance with Logan City Council's (LCC) standards. Prior to construction, approval from LCC for Vehicular Access to Residential Premises is required.
 - The maximum width of a driveway at the lot boundary shall be 4.8 metres for a lot with a double car width garage and 3.0 metres for a lot with a single car width garage.
 - Garages and carports accessed from a Laneway must be built setback 0.9 metres from the boundary. Ingress/egress must be achieved for a B99 Vehicle.
 - Maximum of one driveway per dwelling unless it is a MR lot.
 - Minimum distance of a driveway from an intersection of one street with another street is 6.0 metres. This driveway must be laid at the grade of the adjacent verge area. No grade changes to the verge for the driveway will be allowed.
 - Where there is a footpath within the verge, the footpath should be cut at the nearest joint and the footpath reinstated to the driveway without compromising the structural integrity of the footpath.
 - Driveways must be completed prior to occupation of the dwelling.

- Fencing**
- Fencing erected by Peet must not be altered, modified or removed without prior written approval from Peet.
 - Fencing on all park or street frontages has a maximum height of 1.2 metres where solid or have a maximum height of 1.8 metres where containing openings that make the fence more than 50% transparent.
 - Fencing on all park or street frontages is constructed with visible posts, which are at least 120mm x 120mm and 100mm higher than the infill railings or panels.
 - Fencing on lanes can be screen fencing at 1.8m high where along private open space, carparking and service areas.
 - Fencing on corner lots is to be designed as front fences addressing both streets (rather than a front and a side fence).
 - Notwithstanding the above, solid front fences and walls may be 1.8 metres in height if the dwelling has a frontage to a street with traffic volumes in excess of or projected to exceed 10,000 vehicles per day.
 - Retaining walls must not exceed more than 1.0 metres where fronted to a public street or park. Retaining walls to side and rear boundaries (which are not adjoining a public street or park) can be up to 2.0 metres. Retaining in excess of this must use terraced retaining.
 - No tier retaining walls over 1.0m or adjoining parks or public streets.
 - Walls over 1.0m require RPEQ certification.
- Building Articulation**
- All buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines
 - Window hoods; and/or
 - Use of multiple cladding materials
 - Buildings that do not comply may be assessed on architectural merit when accompanied by a report from a Registered Architect
 - Carports and garages are to be compatible with the main building design in terms of height, roof form, detailing, materials and colours.
 - Building materials must be suitably coloured, stained or painted, including retaining, fences, walls and roofs. Untreated materials, such as zinc coated steel, bare metal, concrete block or masonry panels are not permitted.
 - All air-conditioners, gas bottles, hot water systems, clothes lines and other household services must be screened and/or located to minimise visual impact to public streets or parks.
 - Homes must include a clearly identifiable address and addressed front door and undercover point of entry.
 - Screened drying and rubbish bins area must be behind the main face of the dwelling.
 - At least two openings into habitable rooms to facilitate cross flow ventilation are required.
- Slope and Building Footings**
- Buildings on sloping sites, must be built to the boundary on the low side of the lot and the footing must be projected deep enough to be below the adjoining property building pad level.
 - If the nominated pad level is not provided, the pad level is to be assumed as the average of the four corners of the adjacent block, using the as constructed levels.
 - Building footings are to be designed in accordance with the appropriate Australian Standard. Building footings are to be designed to ensure that there are no adverse impacts (functional, financial or construction limitations) on adjoining allotments, particularly in relation to retaining walls.
- Additional Criteria for Multiple Residential Allotments**
- Buildings must address all street frontages with driveways, pedestrian entries or both.
 - All dwellings must have a clearly identifiable front door, which is undercover.
 - Have drying and rubbish bin areas behind the main face of the dwelling or suitably screen from public streets and park frontages.
 - Maximum number of dwellings on each multiple residential lot is annotated on the Plan of Development.

- Additional Criteria for Secondary Dwellings**
- Floor area must be between a minimum of 30m² and 75m².
 - Materials, detailing, colours and roof form are consistent with those of the primary house.
 - Outdoor living space must measure a minimum of 5m² with a minimum dimension in any direction of 3 metres.
 - Outdoor living space must be directly accessible from the main living space and can be combined with the primary dwelling outdoor space.
 - Outdoor living space on a corner allotment must be suitably screened if located within the secondary street boundary setback.
 - A minimum of one (6m x 3m) car parking space must be provided for the secondary dwelling, in addition to parking for the primary dwelling.
 - The driveway must be shared with the primary house, however on corner allotments a separate driveway may be provided with a minimum width of 3 metres and a maximum width of 5 metres in relation to retaining walls.
 - Corner allotments must provide dedicated pedestrian entry and a visible door from and addressing the secondary street to the secondary dwelling.
 - Corner allotments must provide a minimum of one habitable room, with large windows or balconies, fronting the secondary street.

Definitions

Laneway Allotment - Allotments serviced by a laneway.

Special Siting Requirements for Corner Allotments

REVISION

Z:	08/05/18 Amend Sub-Staging and RRP Lot
AA:	17/02/18 Amend Stage 1P
AB:	06/09/18 Amend Stage 1V, 1W, 1X, 1AR, 1AE & 1AF
AC:	24/01/19 Sub-Staging 1S & 1AG
AD:	20/03/19 POD Amendments & ERM EM
AE:	18/06/19 Amend Stage 1H, 1I, 1R, 1S, 1T and 1U
AF:	08/08/19 POD Amendments
AG:	18/12/19 POD Amendments Stage 1P
AH:	1R, 1S and 1T

Note:
 All dimensions and areas are approximations only, and are subject to survey and Council approval.
 Dimensions have been rounded to the nearest 0.1 metres.
 Areas have been rounded down to the nearest 5m².
 The boundaries shown on this plan should not be used for final detailed engineering design.
Source Information:
 Site boundaries: Registered Survey Plans.
 Adjoining information: DCCB.
 Contours: Canbros Bulk Earthworks

Legend

- Site Boundary
- Proposed Precinct Boundary
- Proposed Stage Boundary
- Proposed Sub Stage Boundary
- Existing OS
- Existing O/D
- Retained Vegetation - Flagstone & Sandy Creek
- Retained Vegetation - Other Areas
- 400m Catchment Area
- Possible Multiple Residential Allotment (Max. no. of dwellings)
- Indicative Bus Stop Location

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Mandatory Built to Boundary Wall
- Normal Built to Boundary Wall
- No Vehicle Access
- Primary Frontage
- Preferred Garage Location
- Letterbox Location (on a laneway)

CLIENT
PEET

PROJECT
 FLAGSTONE PRECINCT 1

PLAN OF DEVELOPMENT
 STAGE 1N, 1P, 1Q & 1T
 RESIDENTIAL LOTS

Date: 16 December 2019
 Comp By: WNW
 Checked By: MD / DG
 DWG Name: Precinct 1 Stage 1
 Job Reference: 110056

Local Authority: ECONOMIC DEVELOPMENT QUEENSLAND
 Locality: JIMBOOMBA
 Scale: 1 : 1000 Sheet: A1
 Plan Ref: 110056 - 133 Rev: AG

RPS

RPS Australia East Pty Ltd
 400m 292 782
 ABN 44 140 292 782
 Urban Design
 Level 4/2 South
 520 Wickham Street
 Fortitude Valley QLD 4006
 T +61 7 2539 9500
 W ppsgroup.com.au

Plan of Development Table	Terrace Allotments		Ascot Allotments		Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Premium Courtyard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential (MR)		
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	
Front/Primary Frontage	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	4.5m	4.5m	4.5m	4.5m	3.0m	3.0m
Garage	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m
Rear	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m	
Side - General Lots																			
Built to Boundary	0.0m	0.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	0.0m	n/a	n/a	n/a	n/a	n/a	n/a
Maximum BTB Wall Length (% of boundary length)	75%			65%		70%		65%		65%		60%		n/a	n/a	n/a	n/a	n/a	n/a
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.0m	1.5m	
Corner Lots - Secondary Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m	
Laneway Lots																			
Rear of Lot (from laneway boundary including garage)	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a	n/a	n/a	n/a
Site Cover																			
Setbacks apply as per lot coding colour	75%			60%		60%		60%		60%		60%		60%		60%		75%	



Plan of Development Table	Terrace Allotments		Ascot Allotments		Villa Allotments		Premium Villa Allotments		Court yard Allotments		Premium Court yard Allotments		Traditional Allotments		Premium Traditional Allotments		Multiple Residential Allotment (MR) 1	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front/Primary Frontage	2.4m	2.4m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	4.5m	4.5m	4.5m	4.5m	3.0m	3.0m
Rear	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a	5.0m	n/a
Side - General Lots	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m	n/a
Built to Boundary	0.0m	0.0m	0.0m	0.0m	0.0m	0.0m	1.0m	1.0m	0.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a	n/a	n/a	n/a
Maximum BTB Wall Length (% of boundary length)	75%		65%		70%		65%		65%		60%		n/a		n/a		n/a	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	0.9m	0.9m	1.0m	1.0m	1.0m	1.5m	1.0m	1.5m	1.5m	2.0m	1.5m	2.0m	1.0m	1.5m
Corner Lots - Secondary Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	2.0m	1.5m	2.0m	1.5m	1.5m
Rear of Lot (from laneway boundary including garage)	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	0.9m	n/a	n/a	n/a	n/a	n/a	n/a
Site Cover	75%		60%		60%		60%		60%		60%		60%		60%		75%	

- Notes:**
- All development is to be undertaken in accordance with the Development Approval, and Queensland Development Code (QDC), except as varied below.
 - The maximum height of buildings shall not exceed two (2) storeys.
 - Maximum building location envelopes are subject to future proposed easements and/or other underground services.
 - All lots subject to an acoustic assessment to determine level of acoustic treatments.
 - Buildings shall be constructed in accordance with Bushfire AS3959.
 - Secondary dwellings are not permitted on lots less than 400m².
 - All lots (excluding multiple residential allotments) must contain a house.
- Special Siting Requirements for Corner Allotments**
-
- Air-conditioners, gas bottles, hot water systems, clothes lines and other household services must be screened and/or located to minimise visual impact to public streets or parks.
 - Homes must include a clearly identifiable and addressed front door and undercover point of entry.
 - Screened drying and rubbish bins area must be behind the main face of the dwelling.
 - At least two openings to all habitable rooms to facilitate cross flow ventilation are required.


- Private Open Space**
- Private open space must measure a minimum of 10m² with a minimum dimension in any direction of 2.4 metres and not be uncovered (no roof).
 - Private open space must be directly accessible from a living space.
- On-site car parking and driveways**
- On-site car parking is to be provided in accordance with the following minimum requirements:
 - For lots up to 12.49 metres wide - 1 covered space per dwelling;
 - For Ascot Allotments - 2 spaces per dwelling, one of which must be capable of being covered;
 - For lots 12.5 metres wide or greater - 2 covered spaces per dwelling;
 - For Multiple Residential sites, at least 1 covered space per dwelling, plus 0.5 spaces per dwelling (can be uncovered).
 - Garages for any single storey dwelling on a Lot between 10.0m and 12.49m in width must adhere to the following design criteria:
 - The front facing building wall, which comprises the garage door, must not exceed an external width of 5.7m.
 - The garage door:
 - Width must not exceed 4.8m
 - Must have a minimum 450mm eave above it
 - Must be setback a minimum of 240mm behind the pillar of the garage door, and
 - Must have a sectional, tilt or roller door.
 - The front facade of the dwelling must be forward of the alignment of the garage wall, and must include the following:
 - A front entrance door with glass inserts and / or windows or with a sidelight where the front door is solid. If the front facade includes a habitable room with window, a sidelight is not required.
 - A front verandah, portico or porch located over the front entrance, which extends a minimum of 1600mm forward of the entrance door
 - The verandah, portico or porch is to include front piers with distinct materials and/or colours.

- Definitions**
- Laneway Allotment - Allotments serviced by a laneway.
- Buildings with a width of more than 10 metres that are visible from a street or park are to include articulation to reduce the mass of the building by one or more of the following:
 - Windows recessed into the facade or bay windows;
 - Balconies, porches or verandahs;
 - Articulation of roof lines;
 - Window hoods; and/or
 - Use of multiple cladding materials
 Buildings that do not comply may be assessed on architectural merit when accompanied by a report from a Registered Architect.
 - Carports and garages are to be compatible with the main building design in terms of height, roof form, detailing, materials and colours.
 - All building materials must be suitably coloured, stained or painted, including retaining, fences, walls and roofs. Untreated materials, such as zinc coated steel, bare metal, concrete block or masonry panels are not permitted.

PLANS AND DOCUMENTS referred to in the PDA DEVELOPMENT APPROVAL

Approval no: DEV2012/402/122

Date: 14 January 2020



REVISION

Z: 08/05/18 Amend Sub-Staging and RRP Lot
 AA: 17/05/18 Amend Stage 1P
 AB: 06/09/18 Amend Stage 1V, 1W, 1X, 1AB
 AC: 1AE & 1AF
 AD: 24/05/19 Sub-Staging 1S & 1AG
 AE: 20/03/19 POD Amendments & ERM EM
 AF: 18/06/19 Amend Stage 1H, 1I, 1R, 1S
 AG: 18/12/19 POD Amendments Stage 1P
 AH: 1R, 1S and 1T

Note:
 All dimensions and areas are approximate only, and are subject to survey and Council approval.
 Dimensions have been rounded to the nearest 0.1 metres.
 Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineering design.

Source Information:
 Site boundaries: Registered Survey Plans.
 Adjoining information: ODOB.
 Contours: Candru Bulk Earthworks

Legend

- Site Boundary
- Proposed Precinct Boundary
- Proposed Stage Boundary
- Proposed Sub Stage Boundary
- Entry Statements - Lease
- Existing OS
- Existing O100
- Retained Vegetation
- Flagstone & Sandy Creek
- Retained Vegetation - Other Areas
- 400m Catchment Area
- Possible Multiple Residential Allotment (Max. no. of dwellings)
- Indicative Bus Stop Location
- Lot Allocation Details
- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Mandatory Built to Boundary Wall
- Normal Built to Boundary Wall
- No Vehicle Access
- Primary Frontage
- Preferred Garage Location
- Letterbox Location for Primary Dwelling (on a laneway)

CLIENT
PEET

PROJECT
 FLAGSTONE PRECINCT 1

PLAN OF DEVELOPMENT
 STAGE 1U & 1W - 1Y RESIDENTIAL LOTS

Date: 16 December 2019
 Comp By: WNW
 Checked by: MD / DG
 DWG Name: Precinct 1 Stage 1
 Job Reference: 110056
 Local Authority: ECONOMIC DEVELOPMENT QUEENSLAND
 Locality: JIMBOOMBA
 Scale: 1:1000 Sheet: A1
 Plan Ref: 110056 - 134 Rev: AG

RPS

RPS Australia East Pty Ltd
 4200 140 292 762
 ABN 44 140 292 762
 Urban Design
 Level 4/10 South
 520 Wickham Street
 PO Box 1059
 Fortitude Valley QLD 4006
 T +61 7 2539 9500
 W rpsgroup.com.au

Legend

General


- Site Boundary
- - - Proposed Precinct Boundary
- - - - Proposed Super Stage Boundary
- - - - - Proposed Sub Stage Boundary
- - - - - 400m Catchment Area
- * Indicative Bus Stop Location
- Padmount Transformer

Open Space

- Regional Recreation Park
- Corridor Park
- Neighbourhood Recreation Park
- Local Recreation Park
- Local Linear Recreation Park
- Stormwater Detention
- Linear Connections
- Entry Statements


On-Street Parking

- Indicative Car Park Location
- Indicative 3.5m Wide Driveway




Parking Bay Diagram
Scale 1 : 100

Parking Breakdown
 Total On-Street Visitor Parking Spaces Provided 611
 Total Residential Dwellings 749
 Total On-Street Visitor Parking Spaces Required 562
 (based on 0.75 per dwelling)

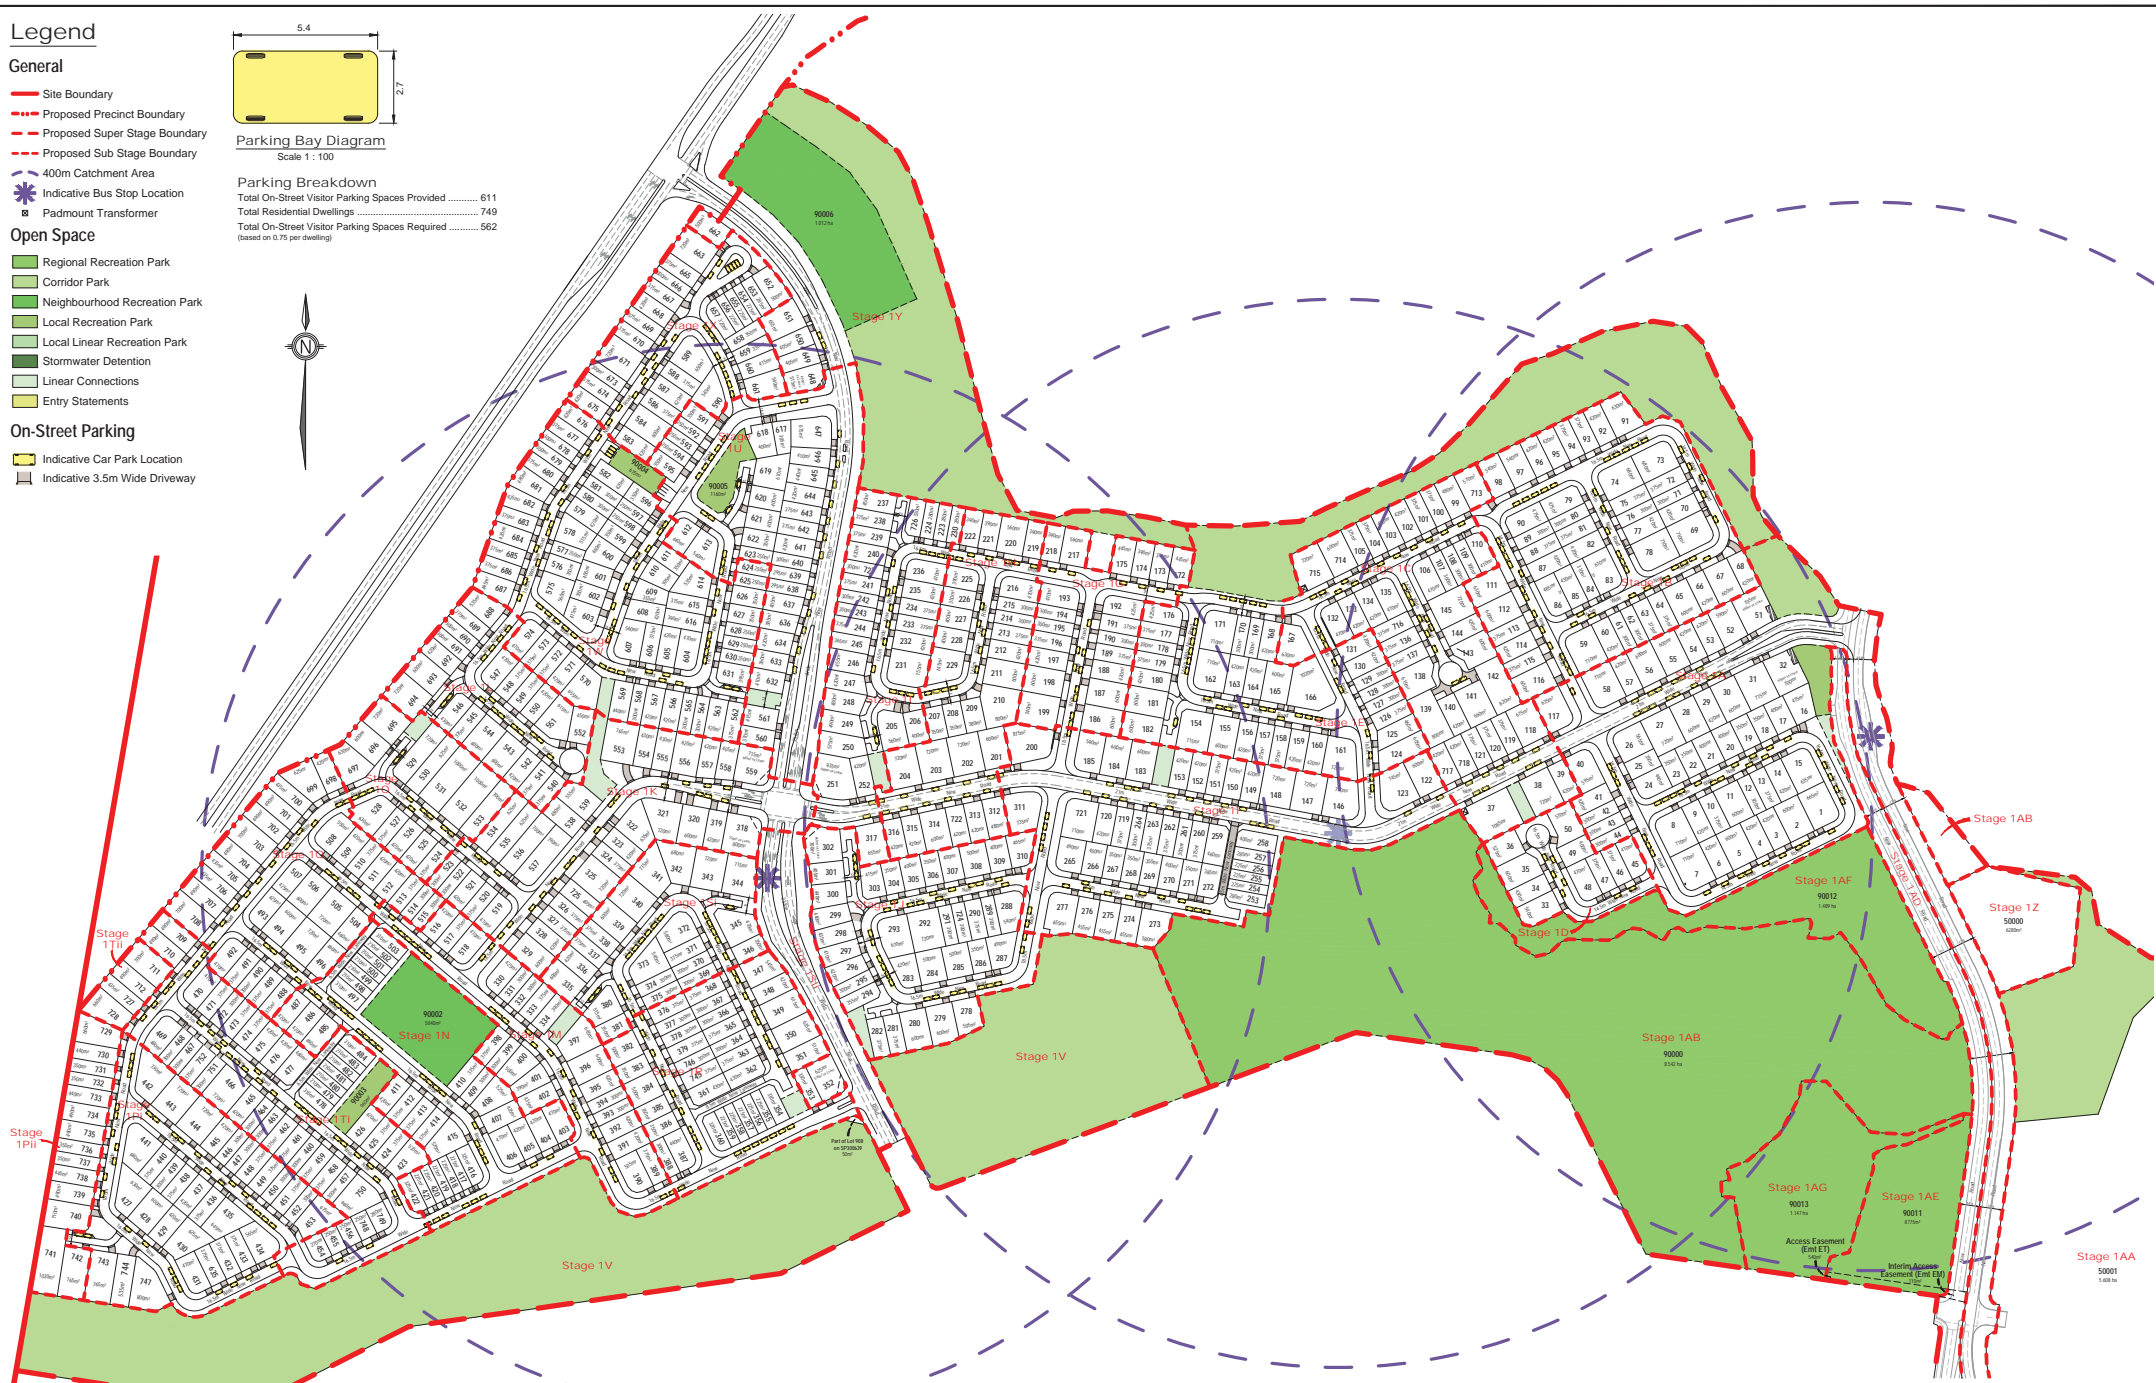

PLANS AND DOCUMENTS referred to in the PDA DEVELOPMENT APPROVAL

Approval no: DEV2012/402/122
 Date: 14 January 2020



REVISION
Z, 08/05/18 Amend Sub-Staging and RRP Lot.
AK, 17/05/18 Amend Stage 1P
AB, 06/09/18 Amend Stage 1V, 1W, 1X, 1AB, 1AE & 1AF
AC, 24/01/19 Sub-Staging 1S & 1AG
AD, 20/03/19 POD Amendments & Emt EM
AE, 18/06/19 Amend Stage 1H, 3U, 1R, 1SN, 1T and 1P
AF, 19/08/19 POD Control Amendments
AG, 16/12/19 POD Amendments Stage 1P
AH, 19, 19 and 1T

PROJECT	CLIENT
FLAGSTONE PRECINCT 1	PEET
Job Ref. 110056	Date 16 December 2019
Comp By. WNW	DWG Name. Precinct 1 Stage 1
Checked By. MD / DG	Locality JIMBOOMBA
Local Authority ECONOMIC DEVELOPMENT QUEENSLAND	

PLAN OF DEVELOPMENT
STAGE 1 PARKING MANAGEMENT PLAN
Scale 1 : 2000

	RPS Australia East Pty Ltd ACN 140 292 762 ABN 44 140 292 762		Urban Design Level 4 HQ South 530 Wickham Street PO Box 1559 Fortitude Valley QLD 4006
	Scale 1 : 2000		T +61 7 3539 9500 W rpsgroup.com.au
Sheet A1	Plan Ref 110056 - 137	Rev AG	