

Development Control Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- The maximum height of buildings shall not exceed 8.5m and two (2) storeys, except when existing grades exceed 15% where the building may be up to 10m and 2 storeys in height.
- The maximum site coverage for each lot is to be in accordance with the Plan of Development Table.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Setbacks are measured to outer most projection (OMP).
- First floor setbacks must not exceed the minimum ground floor setbacks.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Villa and Premium Villa Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Courtyard, Premium Courtyard and Duplex Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Built to Boundary walls are to have a maximum length of 9 metres and a maximum height of 4.5 metres.
- For lot 638 - 0.9m setback applies to the secondary frontage (eastern boundary).

Outdoor Living Space

- Private outdoor living space, must be provided for each dwelling, not less than 20m² in area with a minimum dimension of 3.0m.

Buildings facing a park or more than one street

- Dwellings on lots with more than one frontage to a public right of way (including a road, bikeways, public footpath or the like) must address all public frontages.

Parking and Driveways

Garages:

- Garages must not project forward of the main facade (front wall) of the dwelling.

- Unless otherwise stated, the garage door or parking structure shall occupy no more than 50% of the street frontage for all lots up to 450m² in area, provided that the garage or parking structure is not located forward of the main building line of the dwelling.

Driveways:

- A maximum of one driveway per dwelling is permitted.
- The maximum width of a driveway where crossing the verge:
 - shall be 3.5m for single garages; and
 - 4.8m for double garages.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

Plan of Development Table	Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Duplex Allotments	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front Setback								
Living	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a
Corner Allotments								
Secondary Road Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	3.0m	3.0m
Rear Setback								
Rear	0.9m	1.0m	0.9m	1.0m	0.9m	1.0m	1.0m	2.0m
Side - General Lots								
Built to Boundary	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a
	Optional		Optional		Optional		0.0m	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	1.0m	1.0m	1.2m	2.0m
Garage Location	Preferred Garages are to be located along the built to boundary wall or if no BTB wall on Western or Southern Boundary or Low Side of the Allotment.							
On site parking requirements (minimum)	2 car parking spaces with 1 space to be covered and enclosed Single, tandem or double garage acceptable						1 space to be covered and enclosed per dwelling	
Site Coverage (maximum)	60% for Lots 600m² or less; 50% for Lots greater than 600m²							

Note: * Garage or Carport Door

REVISION
A: 16/02/17 Amend Staging
B: 14/06/17 Amend Layout
C: 12/09/17 Amend Stage 10 & 11 Layout

Note:
All Lot Numbers, Dimensions and Areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Saunders Havill.
Adjoining information: DCDB.
Contours: ETS.

Legend

- Site Boundary
- Proposed Stage Boundary
- Active Open Space
- Drainage Open Space
- Landscaped Entry Statement

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Optional Built to Boundary Wall
- No Vehicle Access
- Preferred Garage Location (on Single Family Dwellings)
- Indicative Garage Location (on Multi Family Dwellings - Subject to Design)

Scale 1 : 1000 @ A1
0 5 10 20 30 40 50 60

CLIENT

PEET

PROJECT

EDEN'S CROSSING
Naturally connected

PLAN OF DEVELOPMENT
STAGES 10 – 14
ALLOTMENT
LAYOUT

Date: 12 SEPTEMBER 2017

Comp By: WNW / JC / MD

Checked By: MD

DWG Name: 132030-34 Stages 10-15

Job Ref: 132030

Local Authority: IPSWICH

CITY COUNCIL

Locality: REDBANK PLAINS

Scale: 1 : 1000

Sheet

A1

Plan Ref: 132030 – 41

Rev

C

RPS

RPS Australia East Pty Ltd
ACN 140 292 762
ABN 44 140 292 762



Urban Design
Brisbane Design Studio
455 Brunswick Street
Fortitude Valley QLD 4006

T+61 7 3124 9300

F+61 7 3124 9399

W rpsgroup.com.au

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment
not permitted. Please contact the author.

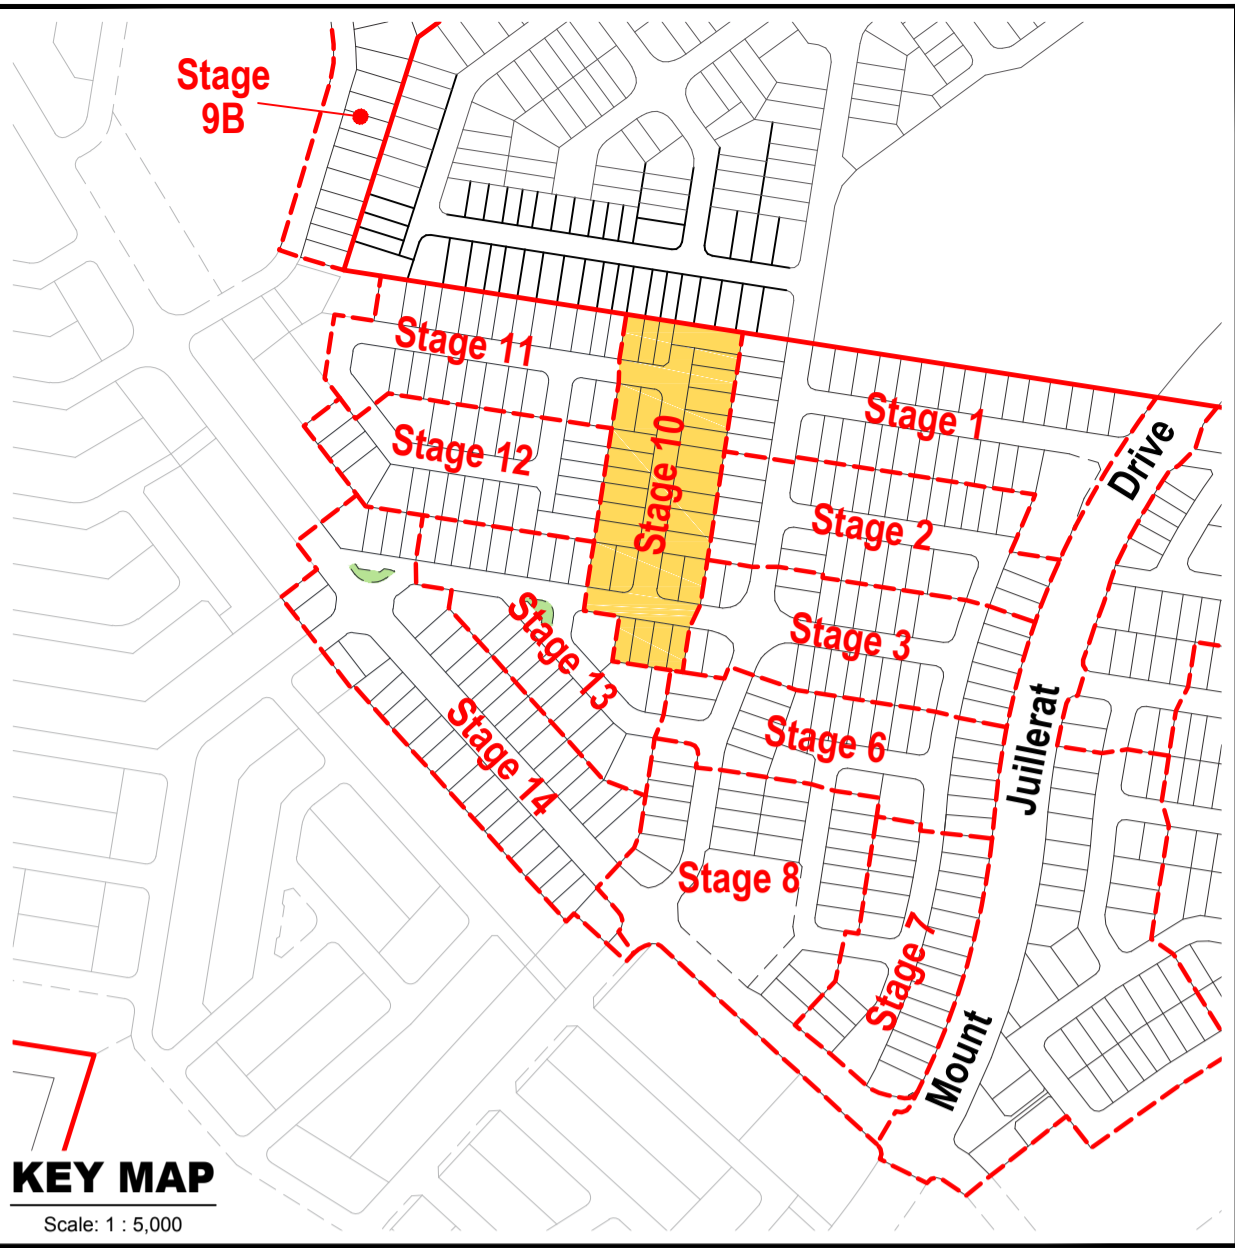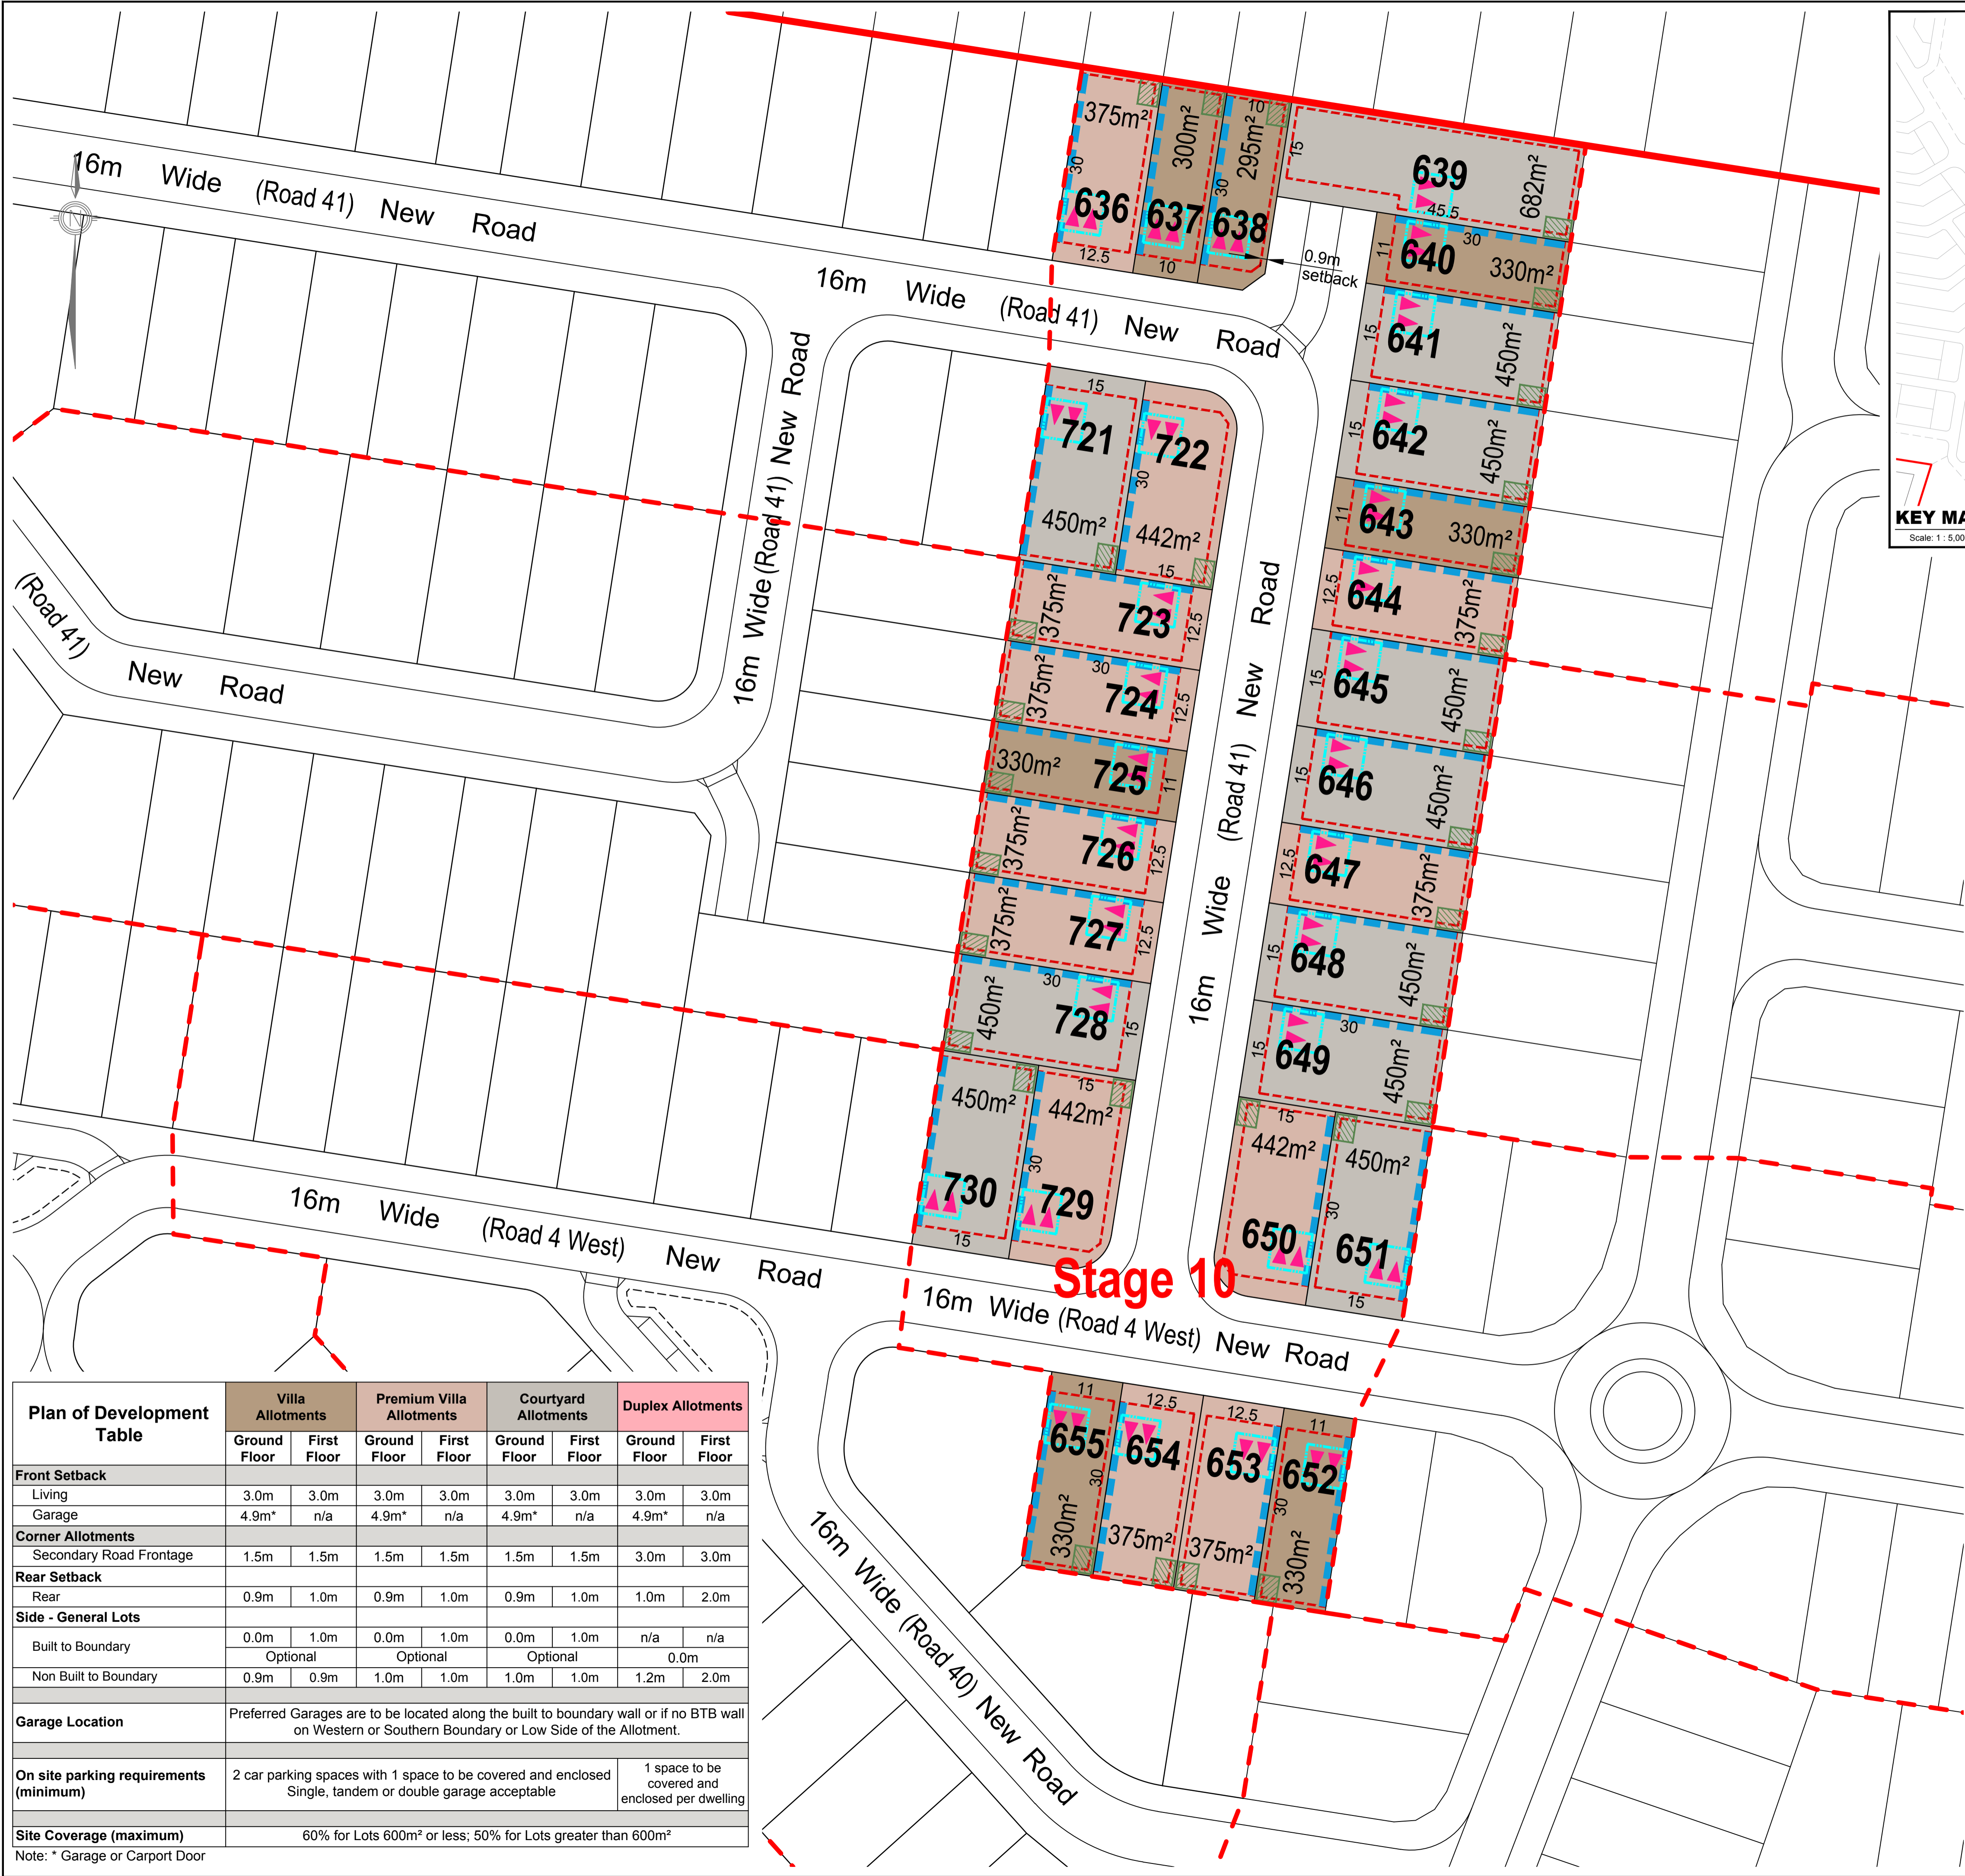

Development Control Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- The maximum height of buildings shall not exceed 8.5m and two (2) storeys, except when existing grades exceed 15% where the building may be up to 10m and 2 storeys in height.
- The maximum site coverage for each lot is to be in accordance with the Plan of Development Table.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Setbacks are measured to outer most projection (OMP).
- First floor setbacks must not exceed the minimum ground floor setbacks.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Villa and Premium Villa Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Courtyard, Premium Courtyard and Duplex Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Built to Boundary walls are to have a maximum length of 9 metres and a maximum height of 4.5 metres.
- For lot 638 - 0.9m setback applies to the secondary frontage (eastern boundary).

Outdoor Living Space

- Private outdoor living space, must be provided for each dwelling, not less than 20m² in area with a minimum dimension of 3.0m.

Buildings facing a park or more than one street

- Dwellings on lots with more than one frontage to a public right of way (including a road, bikeways, public footpath or the like) must address all public frontages.

Parking and Driveways

Garages:

- Garages must not project forward of the main facade (front wall) of the dwelling.
- Unless otherwise stated, the garage door or parking structure shall occupy no more than 50% of the street frontage for all lots up to 450m² in area, provided that the garage or parking structure is not located forward of the main building line of the dwelling.

Driveways:

- A maximum of one driveway per dwelling is permitted.
- The maximum width of a driveway where crossing the verge:
 - shall be 3.5m for single garages; and
 - 4.8m for double garages.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

REVISION
A: 16/02/17 Amend Staging
B: 14/06/17 Amend Layout
C: 12/09/17 Amend Stage 10 & 11 Layout

Note:
All Lot Numbers, Dimensions and Areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Saunders Havill.
Adjoining information: DCDB.
Contours: ETS.

Legend

- Site Boundary
- Proposed Stage Boundary
- Active Open Space
- Drainage Open Space
- Landscaped Entry Statement

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Optional Built to Boundary Wall
- No Vehicle Access
- Preferred Garage Location (on Single Family Dwellings)
- Indicative Garage Location (on Multi Family Dwellings - Subject to Design)

Scale 1 : 500 @ A1
0 5 10 15 20 25 30

CLIENT

PEET

PROJECT

EDEN'S CROSSING
Naturally connected

PLAN OF DEVELOPMENT
STAGE 10
ALLOTMENT
LAYOUT

Date: 12 SEPTEMBER 2017

Comp By: WNW / JC / MD

Checked By: MD

DWG Name: 132030-34 Stages 10-15

Job Ref: 132030

Local Authority: IPSWICH

CITY COUNCIL

Locality: REDBANK PLAINS

Scale: 1 : 500

Sheet

A1

Plan Ref: 132030 – 42

Rev

C

RPS

RPS Australia East Pty Ltd
ACN 140 292 762
ABN 44 140 292 762

Urban Design
Brisbane Design Studio
455 Brunswick Street
Fortitude Valley QLD 4006

T+61 7 3124 9300



F+61 7 3124 9399

w rpsgroup.com.au

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment
not permitted. Please contact the author.

Plan of Development Table	Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Duplex Allotments	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front Setback								
Living	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a
Corner Allotments								
Secondary Road Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	3.0m	3.0m
Rear Setback								
Rear	0.9m	1.0m	0.9m	1.0m	0.9m	1.0m	1.0m	2.0m
Side - General Lots								
Built to Boundary	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a
	Optional		Optional		Optional		0.0m	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	1.0m	1.0m	1.2m	2.0m
Garage Location	Preferred Garages are to be located along the built to boundary wall or if no BTB wall on Western or Southern Boundary or Low Side of the Allotment.							
On site parking requirements (minimum)	2 car parking spaces with 1 space to be covered and enclosed Single, tandem or double garage acceptable						1 space to be covered and enclosed per dwelling	
Site Coverage (maximum)	60% for Lots 600m² or less; 50% for Lots greater than 600m²							

Note: * Garage or Carport Door

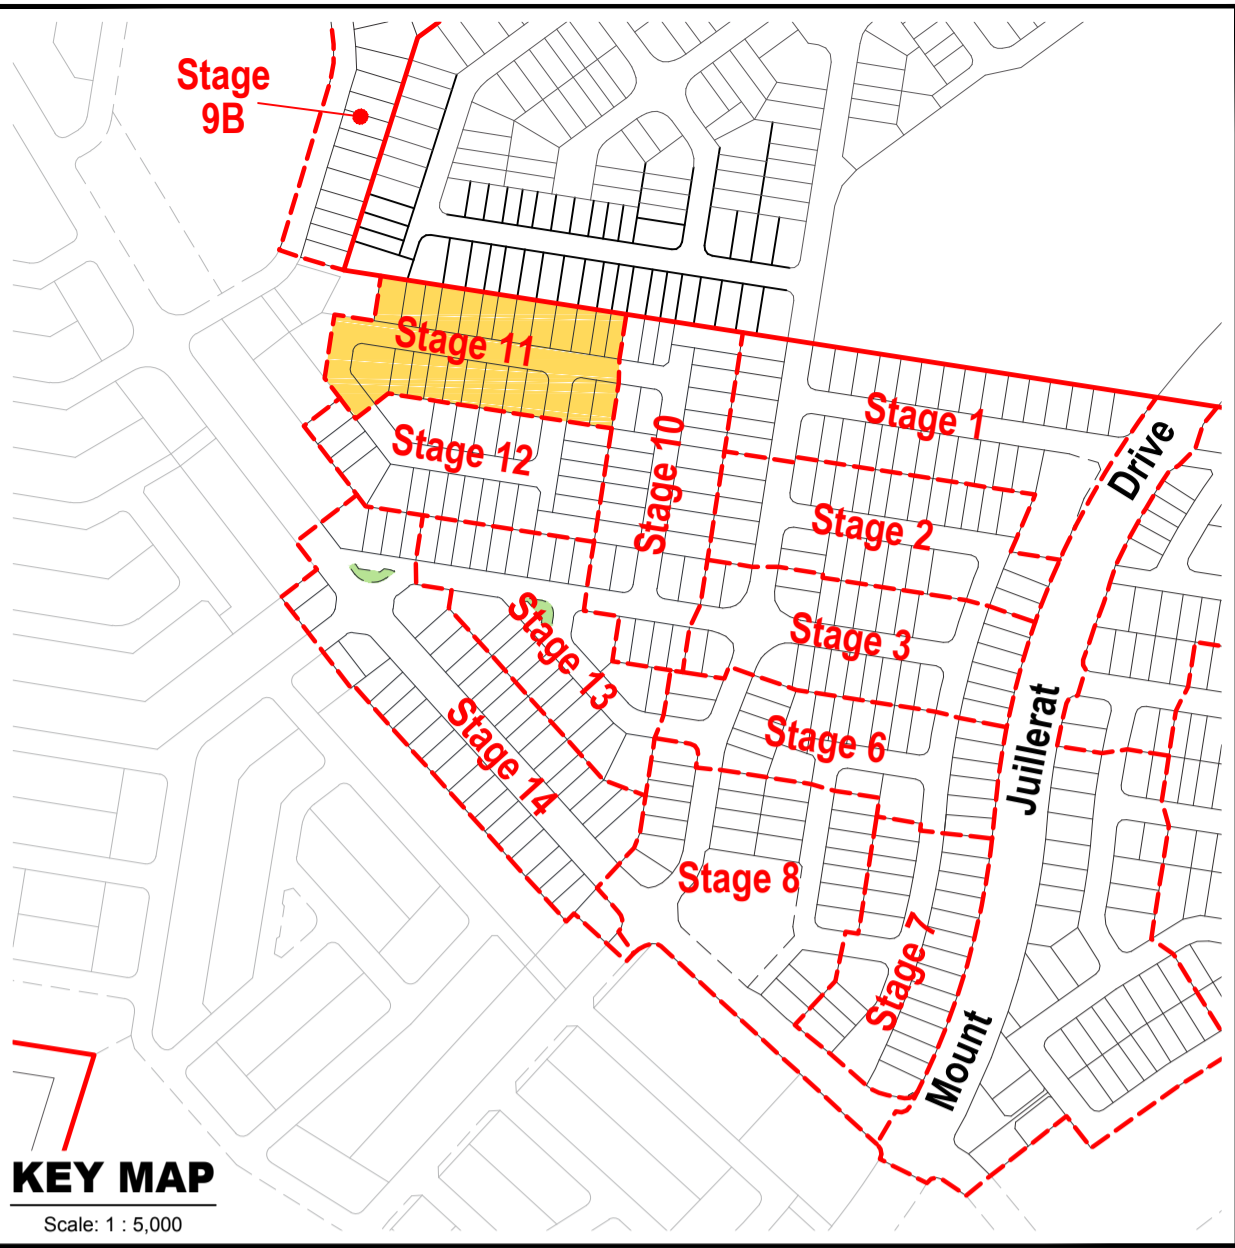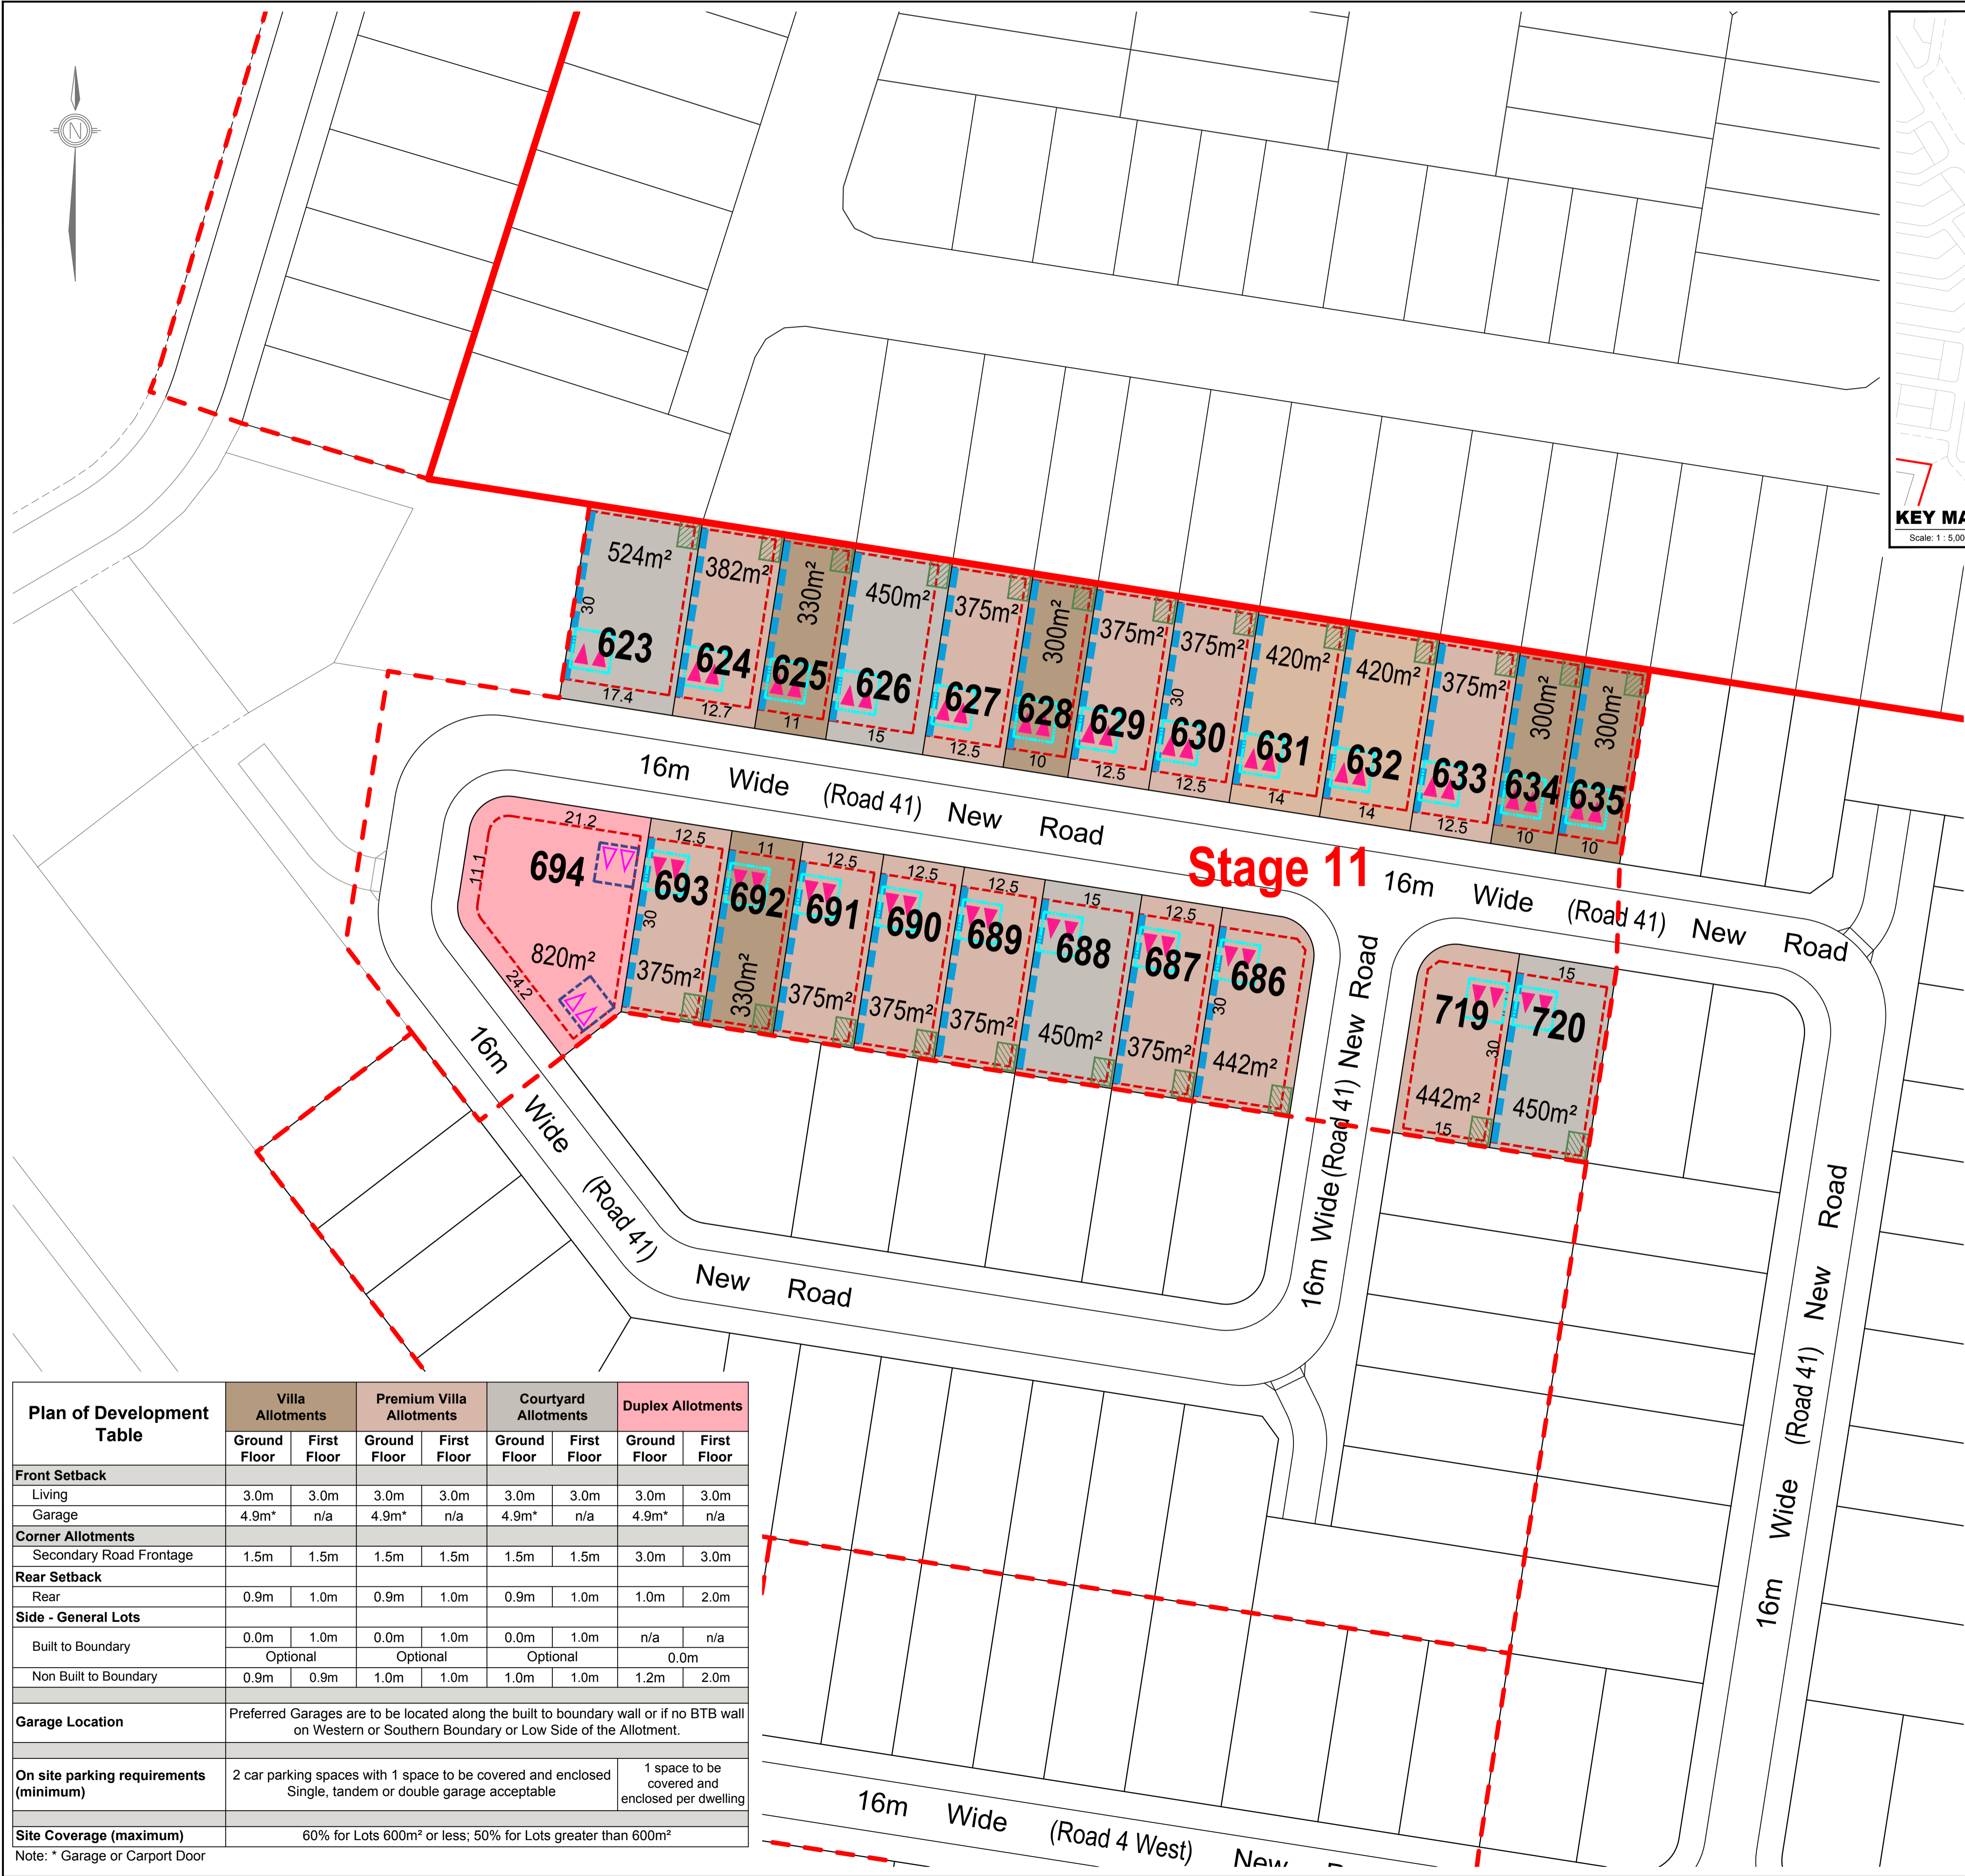

Development Control Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- The maximum height of buildings shall not exceed 8.5m and two (2) storeys, except when existing grades exceed 15% where the building may be up to 10m and 2 storeys in height.
- The maximum site coverage for each lot is to be in accordance with the Plan of Development Table.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Setbacks are measured to outer most projection (OMP).
- First floor setbacks must not exceed the minimum ground floor setbacks.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Villa and Premium Villa Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Courtyard, Premium Courtyard and Duplex Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Built to Boundary walls are to have a maximum length of 9 metres and a maximum height of 4.5 metres.
- For lot 638 - 0.9m setback applies to the secondary frontage (eastern boundary).

Outdoor Living Space

- Private outdoor living space, must be provided for each dwelling, not less than 20m² in area with a minimum dimension of 3.0m.

Buildings facing a park or more than one street

- Dwellings on lots with more than one frontage to a public right of way (including a road, bikeways, public footpath or the like) must address all public frontages.

Parking and Driveways

Garages:

- Garages must not project forward of the main facade (front wall) of the dwelling.
- Unless otherwise stated, the garage door or parking structure shall occupy no more than 50% of the street frontage for all lots up to 450m² in area, provided that the garage or parking structure is not located forward of the main building line of the dwelling.

Driveways:

- A maximum of one driveway per dwelling is permitted.
- The maximum width of a driveway where crossing the verge:
 - shall be 3.5m for single garages; and
 - 4.8m for double garages.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

REVISION

- A: 16/02/17 Amend Staging
B: 14/06/17 Amend Layout
C: 12/09/17 Amend Stage 10 & 11 Layout

Note:

All Lot Numbers, Dimensions and Areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Saunders Havill.
Adjoining information: DCDB.
Contours: ETS.

Legend

- Site Boundary
- Proposed Stage Boundary
- Active Open Space
- Drainage Open Space
- Landscaped Entry Statement

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Optional Built to Boundary Wall
- No Vehicle Access
- Preferred Garage Location (on Single Family Dwellings)
- Indicative Garage Location (on Multi Family Dwellings - Subject to Design)

Scale 1 : 500 @ A1
0 5 10 15 20 25 30

CLIENT

PEET

PROJECT

EDEN'S CROSSING
Naturally connected

PLAN OF DEVELOPMENT
STAGE 11
ALLOTMENT
LAYOUT

Date: 12 SEPTEMBER 2017

Comp By: WNW / JC / MD

Checked By: MD

DWG Name: 132030-34 Stages 10-15

Job Ref: 132030

Local Authority: IPSWICH CITY COUNCIL

Locality: REDBANK PLAINS

Scale: 1 : 500

Sheet: A1

Plan Ref: 132030 - 43

Rev: C

RPS

RPS Australia East Pty Ltd
ACN 140 292 762
ABN 44 140 292 762

Urban Design
Brisbane Design Studio
455 Brunswick Street
Fortitude Valley QLD 4006


T+61 7 3124 9300
F+61 7 3124 9399

W rpsgroup.com.au

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment
not permitted. Please contact the author.

Plan of Development Table	Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Duplex Allotments	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front Setback								
Living	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a
Corner Allotments								
Secondary Road Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	3.0m	3.0m
Rear Setback								
Rear	0.9m	1.0m	0.9m	1.0m	0.9m	1.0m	1.0m	2.0m
Side - General Lots								
Built to Boundary	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a
	Optional		Optional		Optional		0.0m	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	1.0m	1.0m	1.2m	2.0m
Garage Location	Preferred Garages are to be located along the built to boundary wall or if no BTB wall on Western or Southern Boundary or Low Side of the Allotment.							
On site parking requirements (minimum)	2 car parking spaces with 1 space to be covered and enclosed Single, tandem or double garage acceptable						1 space to be covered and enclosed per dwelling	
Site Coverage (maximum)	60% for Lots 600m² or less; 50% for Lots greater than 600m²							

Note: * Garage or Carport Door

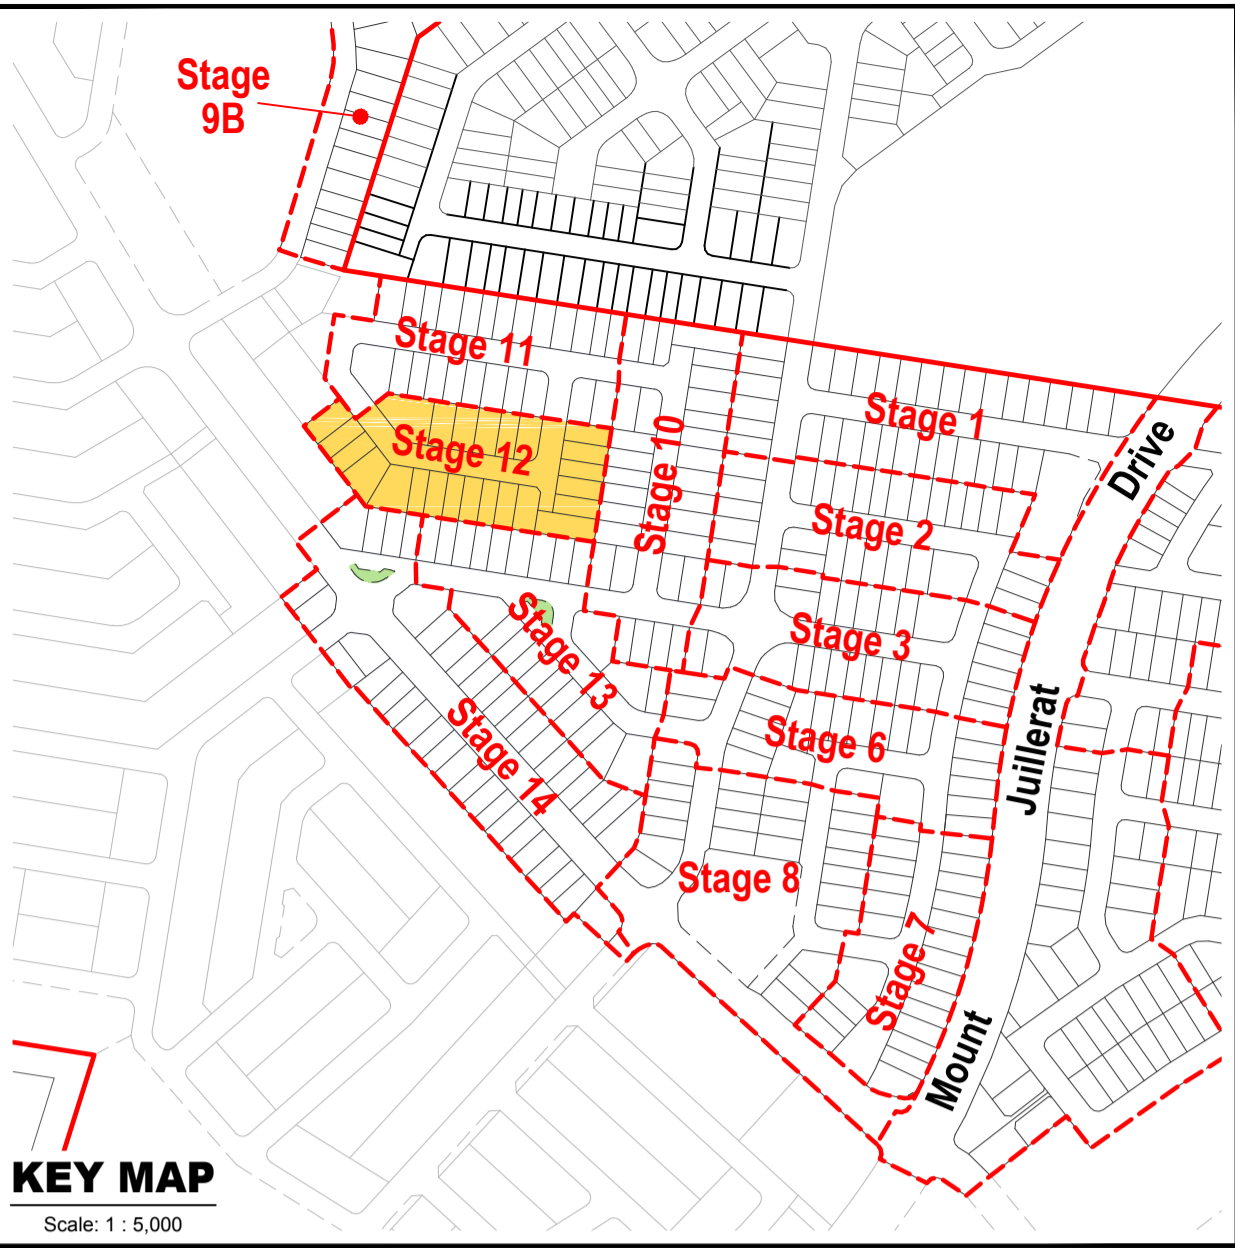

Development Control Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- The maximum height of buildings shall not exceed 8.5m and two (2) storeys, except when existing grades exceed 15% where the building may be up to 10m and 2 storeys in height.
- The maximum site coverage for each lot is to be in accordance with the Plan of Development Table.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Setbacks are measured to outer most projection (OMP).
- First floor setbacks must not exceed the minimum ground floor setbacks.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Villa and Premium Villa Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Courtyard, Premium Courtyard and Duplex Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Built to Boundary walls are to have a maximum length of 9 metres and a maximum height of 4.5 metres.
- For lot 638 - 0.9m setback applies to the secondary frontage (eastern boundary).

Outdoor Living Space

- Private outdoor living space, must be provided for each dwelling, not less than 20m² in area with a minimum dimension of 3.0m.

Buildings facing a park or more than one street

- Dwellings on lots with more than one frontage to a public right of way (including a road, bikeways, public footpath or the like) must address all public frontages.

Parking and Driveways

Garages:

- Garages must not project forward of the main facade (front wall) of the dwelling.
- Unless otherwise stated, the garage door or parking structure shall occupy no more than 50% of the street frontage for all lots up to 450m² in area, provided that the garage or parking structure is not located forward of the main building line of the dwelling.

Driveways:

- A maximum of one driveway per dwelling is permitted.
- The maximum width of a driveway where crossing the verge:
 - shall be 3.5m for single garages; and
 - 4.8m for double garages.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

Plan of Development Table	Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Duplex Allotments	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front Setback								
Living	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a
Corner Allotments								
Secondary Road Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	3.0m	3.0m
Rear Setback								
Rear	0.9m	1.0m	0.9m	1.0m	0.9m	1.0m	1.0m	2.0m
Side - General Lots								
Built to Boundary	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a
	Optional		Optional		Optional		0.0m	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	1.0m	1.0m	1.2m	2.0m
Garage Location	Preferred Garages are to be located along the built to boundary wall or if no BTB wall on Western or Southern Boundary or Low Side of the Allotment.							
On site parking requirements (minimum)	2 car parking spaces with 1 space to be covered and enclosed Single, tandem or double garage acceptable						1 space to be covered and enclosed per dwelling	
Site Coverage (maximum)	60% for Lots 600m² or less; 50% for Lots greater than 600m²							

Note: * Garage or Carport Door

REVISION
A: 16/02/17 Amend Staging
B: 14/06/17 Amend Layout
C: 12/09/17 Amend Stage 10 & 11 Layout

Note:
All Lot Numbers, Dimensions and Areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Saunders Havill.
Adjoining information: DCDB.
Contours: ETS.

Legend

- Site Boundary
- Proposed Stage Boundary
- Active Open Space
- Drainage Open Space
- Landscaped Entry Statement

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Optional Built to Boundary Wall
- No Vehicle Access
- Preferred Garage Location (on Single Family Dwellings)
- Indicative Garage Location (on Multi Family Dwellings - Subject to Design)

Scale 1 : 500 @ A1
0 5 10 15 20 25 30

CLIENT

PEET

PROJECT

EDEN'S CROSSING
Naturally connected

PLAN OF DEVELOPMENT
STAGE 12
ALLOTMENT
LAYOUT

Date: 12 SEPTEMBER 2017

Comp By: WNW / JC / MD

Checked By: MD

DWG Name: 132030-34 Stages 10-15

Job Ref: 132030

Local Authority: IPSWICH CITY COUNCIL

Locality: REDBANK PLAINS

Scale: 1 : 500 Sheet: A1

Plan Ref: 132030 – 44 Rev: C

RPS



RPS Australia East Pty Ltd
ACN 140 292 762
ABN 44 140 292 762

Urban Design
Brisbane Design Studio
455 Brunswick Street
Fortitude Valley QLD 4006

T+61 7 3124 9300
F+61 7 3124 9399

w rpsgroup.com.au

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment
not permitted. Please contact the author.

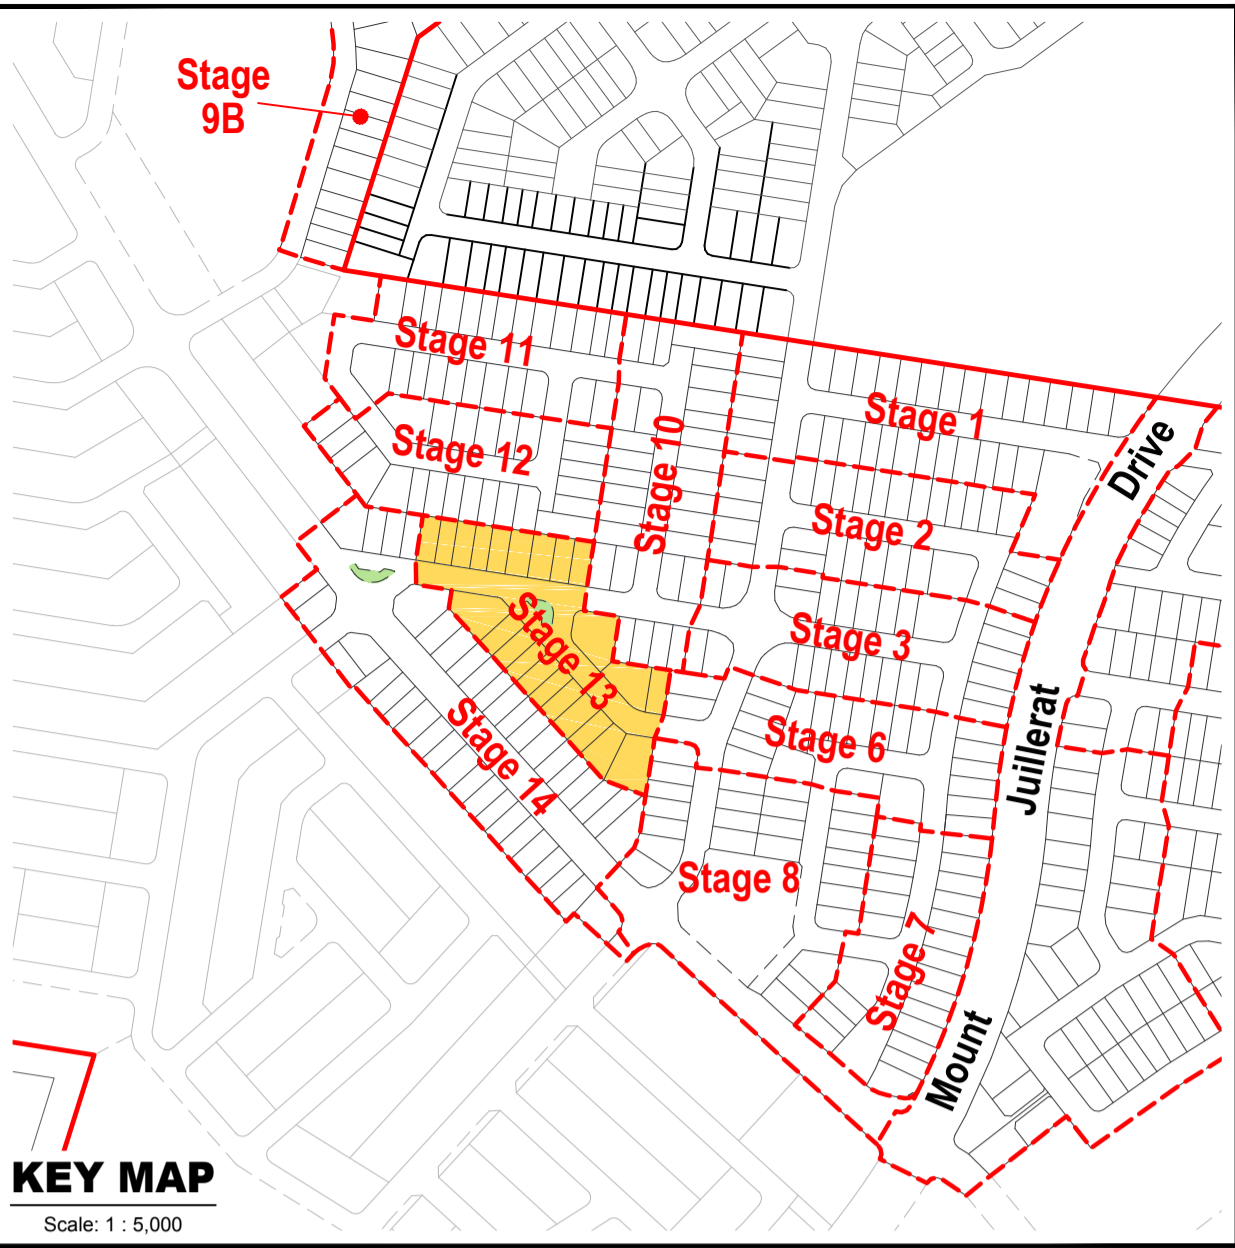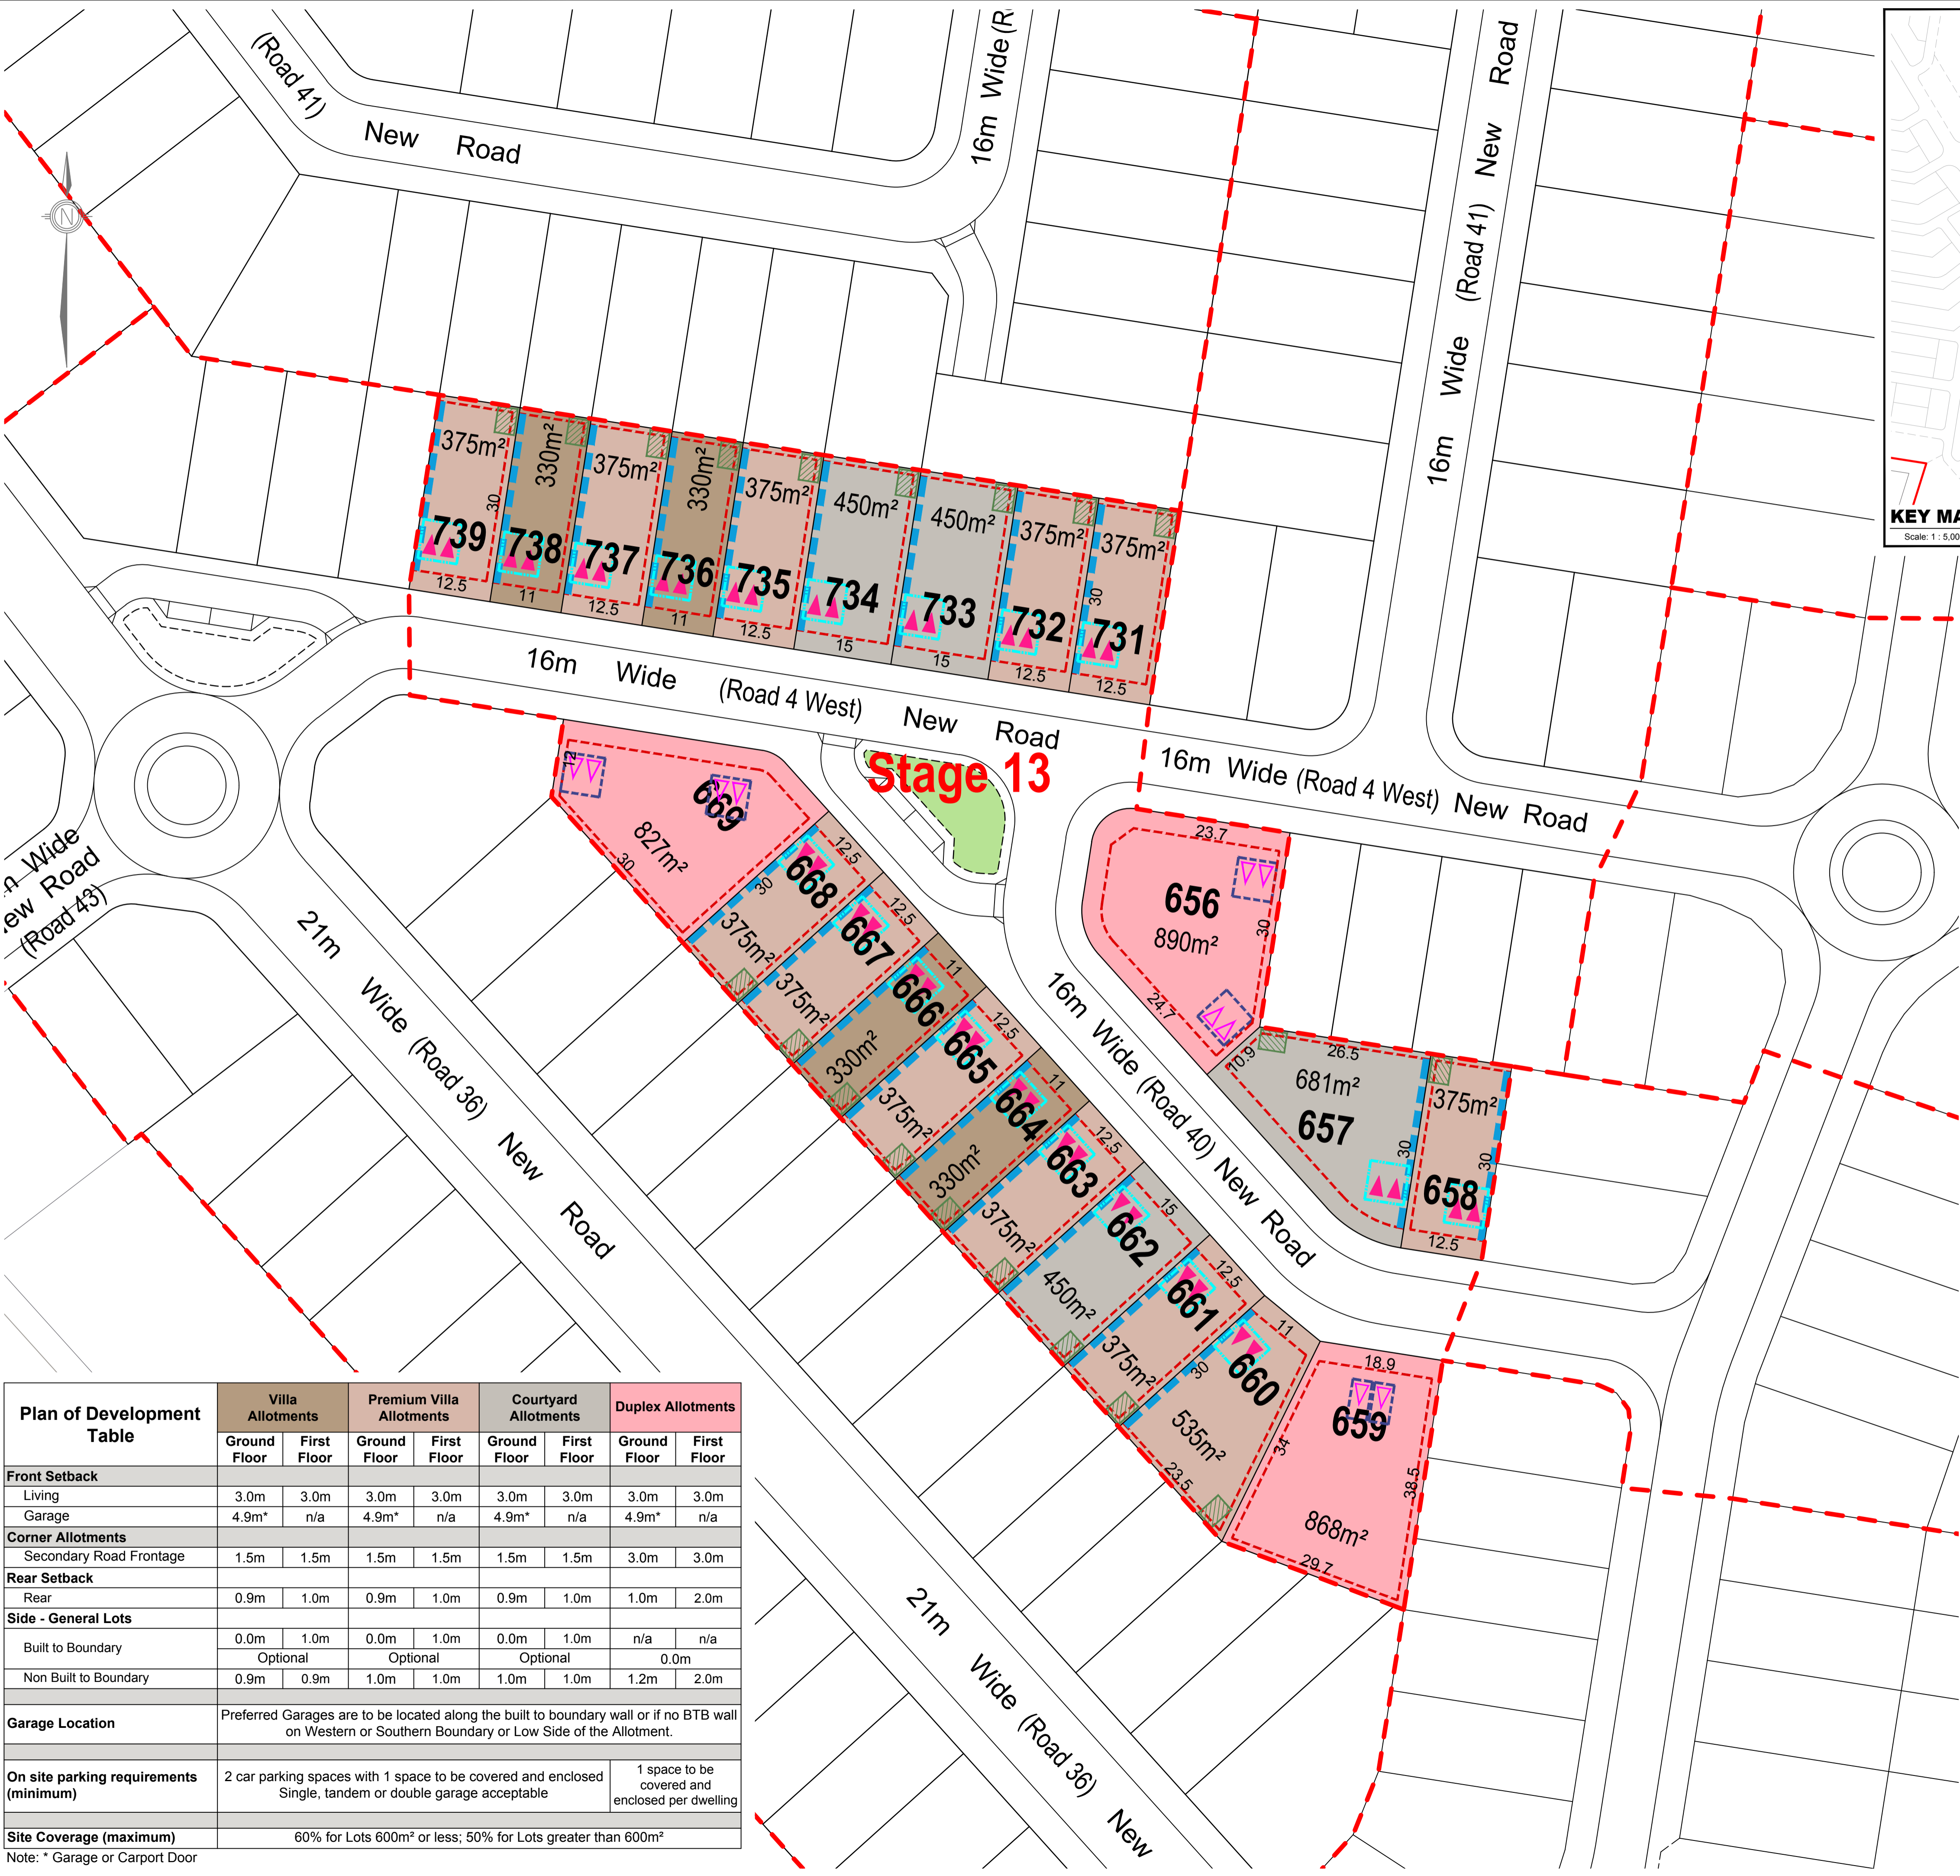

Development Control Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- The maximum height of buildings shall not exceed 8.5m and two (2) storeys, except when existing grades exceed 15% where the building may be up to 10m and 2 storeys in height.
- The maximum site coverage for each lot is to be in accordance with the Plan of Development Table.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Setbacks are measured to outer most projection (OMP).
- First floor setbacks must not exceed the minimum ground floor setbacks.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Villa and Premium Villa Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Courtyard, Premium Courtyard and Duplex Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Built to Boundary walls are to have a maximum length of 9 metres and a maximum height of 4.5 metres.
- For lot 638 - 0.9m setback applies to the secondary frontage (eastern boundary).

Outdoor Living Space

- Private outdoor living space, must be provided for each dwelling, not less than 20m² in area with a minimum dimension of 3.0m.

Buildings facing a park or more than one street

- Dwellings on lots with more than one frontage to a public right of way (including a road, bikeways, public footpath or the like) must address all public frontages.

Parking and Driveways

Garages:

- Garages must not project forward of the main facade (front wall) of the dwelling.

- Unless otherwise stated, the garage door or parking structure shall occupy no more than 50% of the street frontage for all lots up to 450m² in area, provided that the garage or parking structure is not located forward of the main building line of the dwelling.

Driveways:

- A maximum of one driveway per dwelling is permitted.
- The maximum width of a driveway where crossing the verge:
 - shall be 3.5m for single garages; and
 - 4.8m for double garages.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

Plan of Development Table	Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Duplex Allotments	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front Setback								
Living	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a
Corner Allotments								
Secondary Road Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	3.0m	3.0m
Rear Setback								
Rear	0.9m	1.0m	0.9m	1.0m	0.9m	1.0m	1.0m	2.0m
Side - General Lots								
Built to Boundary	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a
	Optional		Optional		Optional		0.0m	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	1.0m	1.0m	1.2m	2.0m
Garage Location	Preferred Garages are to be located along the built to boundary wall or if no BTB wall on Western or Southern Boundary or Low Side of the Allotment.							
On site parking requirements (minimum)	2 car parking spaces with 1 space to be covered and enclosed Single, tandem or double garage acceptable						1 space to be covered and enclosed per dwelling	
Site Coverage (maximum)	60% for Lots 600m² or less; 50% for Lots greater than 600m²							

Note: * Garage or Carport Door

REVISION
A: 16/02/17 Amend Staging
B: 14/06/17 Amend Layout
C: 12/09/17 Amend Stage 10 & 11 Layout

Note:
All Lot Numbers, Dimensions and Areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Saunders Havill.
Adjoining information: DCDB.
Contours: ETS.

Legend

- Site Boundary
- Proposed Stage Boundary
- Active Open Space
- Drainage Open Space
- Landscaped Entry Statement

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Optional Built to Boundary Wall
- No Vehicle Access
- Preferred Garage Location (on Single Family Dwellings)
- Indicative Garage Location (on Multi Family Dwellings - Subject to Design)

Scale 1 : 500 @ A1
0 5 10 15 20 25 30

CLIENT

PEET

PROJECT

EDEN'S CROSSING
Naturally connected

PLAN OF DEVELOPMENT
STAGE 13
ALLOTMENT
LAYOUT

Date: 12 SEPTEMBER 2017

Comp By: WNW / JC / MD

Checked By: MD

DWG Name: 132030-34 Stages 10-15

Job Ref: 132030

Local Authority: IPSWICH
CITY COUNCIL

Locality: REDBANK PLAINS

Scale: 1 : 500

Sheet

A1

Plan Ref: 132030 - 45

Rev

C

RPS



RPS Australia East Pty Ltd
ACN 140 292 762
ABN 44 140 292 762

Urban Design
Brisbane Design Studio
455 Brunswick Street
Fortitude Valley QLD 4006

T+61 7 3124 9300
F+61 7 3124 9399

W rpsgroup.com.au

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment
not permitted. Please contact the author.

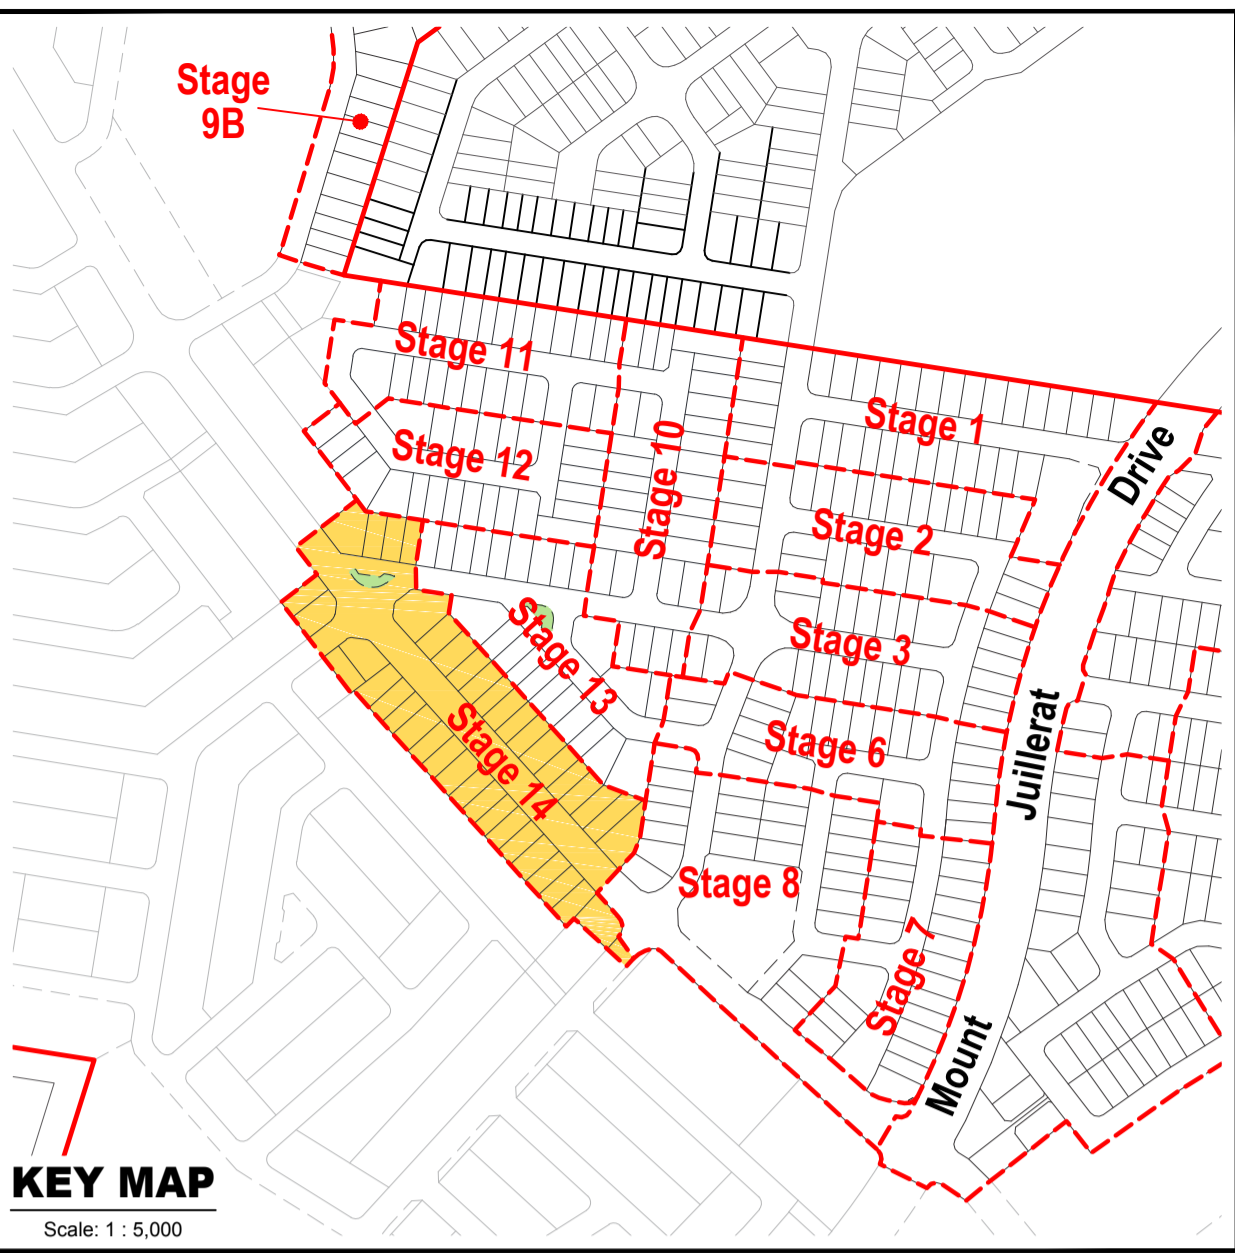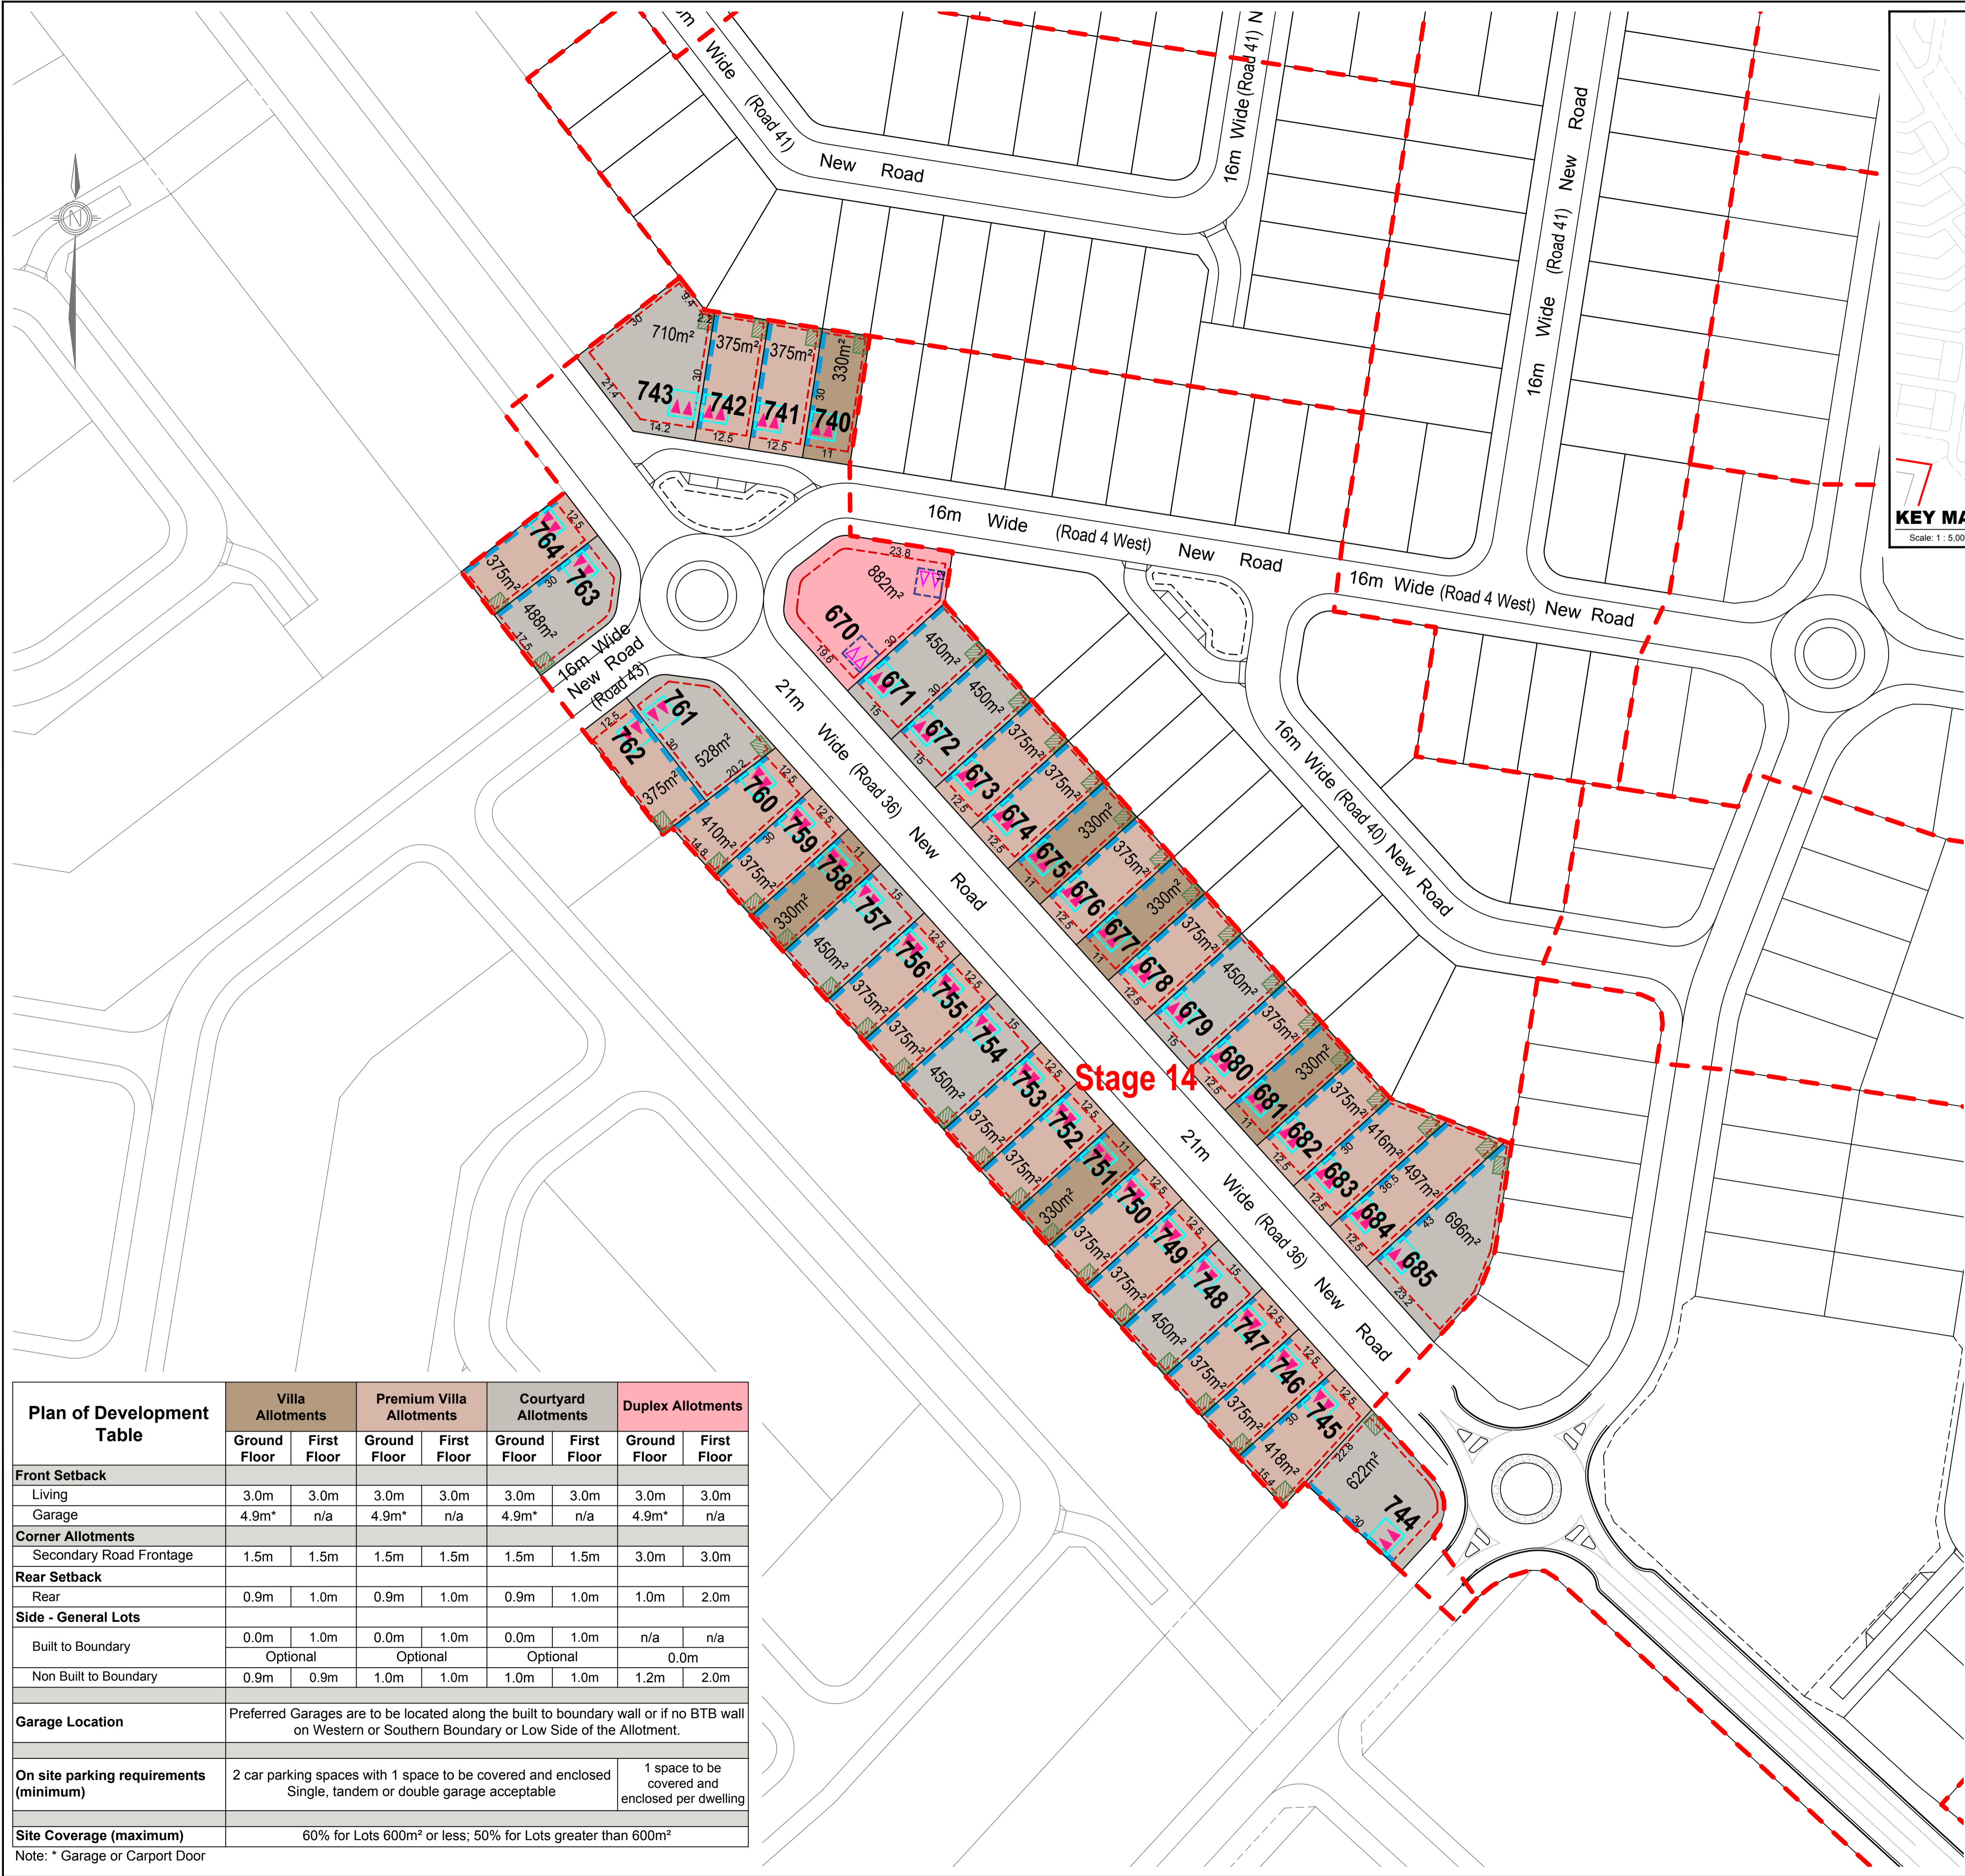

Development Control Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- The maximum height of buildings shall not exceed 8.5m and two (2) storeys, except when existing grades exceed 15% where the building may be up to 10m and 2 storeys in height.
- The maximum site coverage for each lot is to be in accordance with the Plan of Development Table.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Setbacks are measured to outer most projection (OMP).
- First floor setbacks must not exceed the minimum ground floor setbacks.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Villa and Premium Villa Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Courtyard, Premium Courtyard and Duplex Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Built to Boundary walls are to have a maximum length of 9 metres and a maximum height of 4.5 metres.
- For lot 638 - 0.9m setback applies to the secondary frontage (eastern boundary).

Outdoor Living Space

- Private outdoor living space, must be provided for each dwelling, not less than 20m² in area with a minimum dimension of 3.0m.

Buildings facing a park or more than one street

- Dwellings on lots with more than one frontage to a public right of way (including a road, bikeways, public footpath or the like) must address all public frontages.

Parking and Driveways

Garages:

- Garages must not project forward of the main facade (front wall) of the dwelling.

- Unless otherwise stated, the garage door or parking structure shall occupy no more than 50% of the street frontage for all lots up to 450m² in area, provided that the garage or parking structure is not located forward of the main building line of the dwelling.

Driveways:

- A maximum of one driveway per dwelling is permitted.
- The maximum width of a driveway where crossing the verge:
 - shall be 3.5m for single garages; and
 - 4.8m for double garages.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

Plan of Development Table	Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Duplex Allotments	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front Setback								
Living	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a
Corner Allotments								
Secondary Road Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	3.0m	3.0m
Rear Setback								
Rear	0.9m	1.0m	0.9m	1.0m	0.9m	1.0m	1.0m	2.0m
Side - General Lots								
Built to Boundary	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a
	Optional		Optional		Optional		0.0m	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	1.0m	1.0m	1.2m	2.0m
Garage Location	Preferred Garages are to be located along the built to boundary wall or if no BTB wall on Western or Southern Boundary or Low Side of the Allotment.							
On site parking requirements (minimum)	2 car parking spaces with 1 space to be covered and enclosed Single, tandem or double garage acceptable						1 space to be covered and enclosed per dwelling	
Site Coverage (maximum)	60% for Lots 600m² or less; 50% for Lots greater than 600m²							

Note: * Garage or Carport Door

REVISION
A: 16/02/17 Amend Staging
B: 14/06/17 Amend Layout
C: 12/09/17 Amend Stage 10 & 11 Layout

Note:
All Lot Numbers, Dimensions and Areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Saunders Havill.
Adjoining information: DCDB.
Contours: ETS.

Legend

- Site Boundary
- Proposed Stage Boundary
- Active Open Space
- Drainage Open Space
- Landscaped Entry Statement

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Optional Built to Boundary Wall
- No Vehicle Access
- Preferred Garage Location (on Single Family Dwellings)
- Indicative Garage Location (on Multi Family Dwellings - Subject to Design)

Scale 1 : 750 @ A1
0 5 10 20 30 40 50

CLIENT

PEET

PROJECT

EDEN'S CROSSING
Naturally connected

PLAN OF DEVELOPMENT
STAGE 14
ALLOTMENT
LAYOUT

Date: 12 SEPTEMBER 2017

Comp By: WNW / JC / MD

Checked By: MD

DWG Name: 132030-34 Stages 10-15

Job Ref: 132030

Local Authority: IPSWICH
CITY COUNCIL

Locality: REDBANK PLAINS



Scale: 1 : 750
Sheet: A1

Plan Ref: 132030 - 46
Rev: C

RPS

RPS Australia East Pty Ltd
ACN 140 292 762
ABN 44 140 292 762
Urban Design
Brisbane Design Studio
455 Brunswick Street
Fortitude Valley QLD 4006
T+61 7 3124 9300
F+61 7 3124 9399
w rpsgroup.com.au

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment
not permitted. Please contact the author.

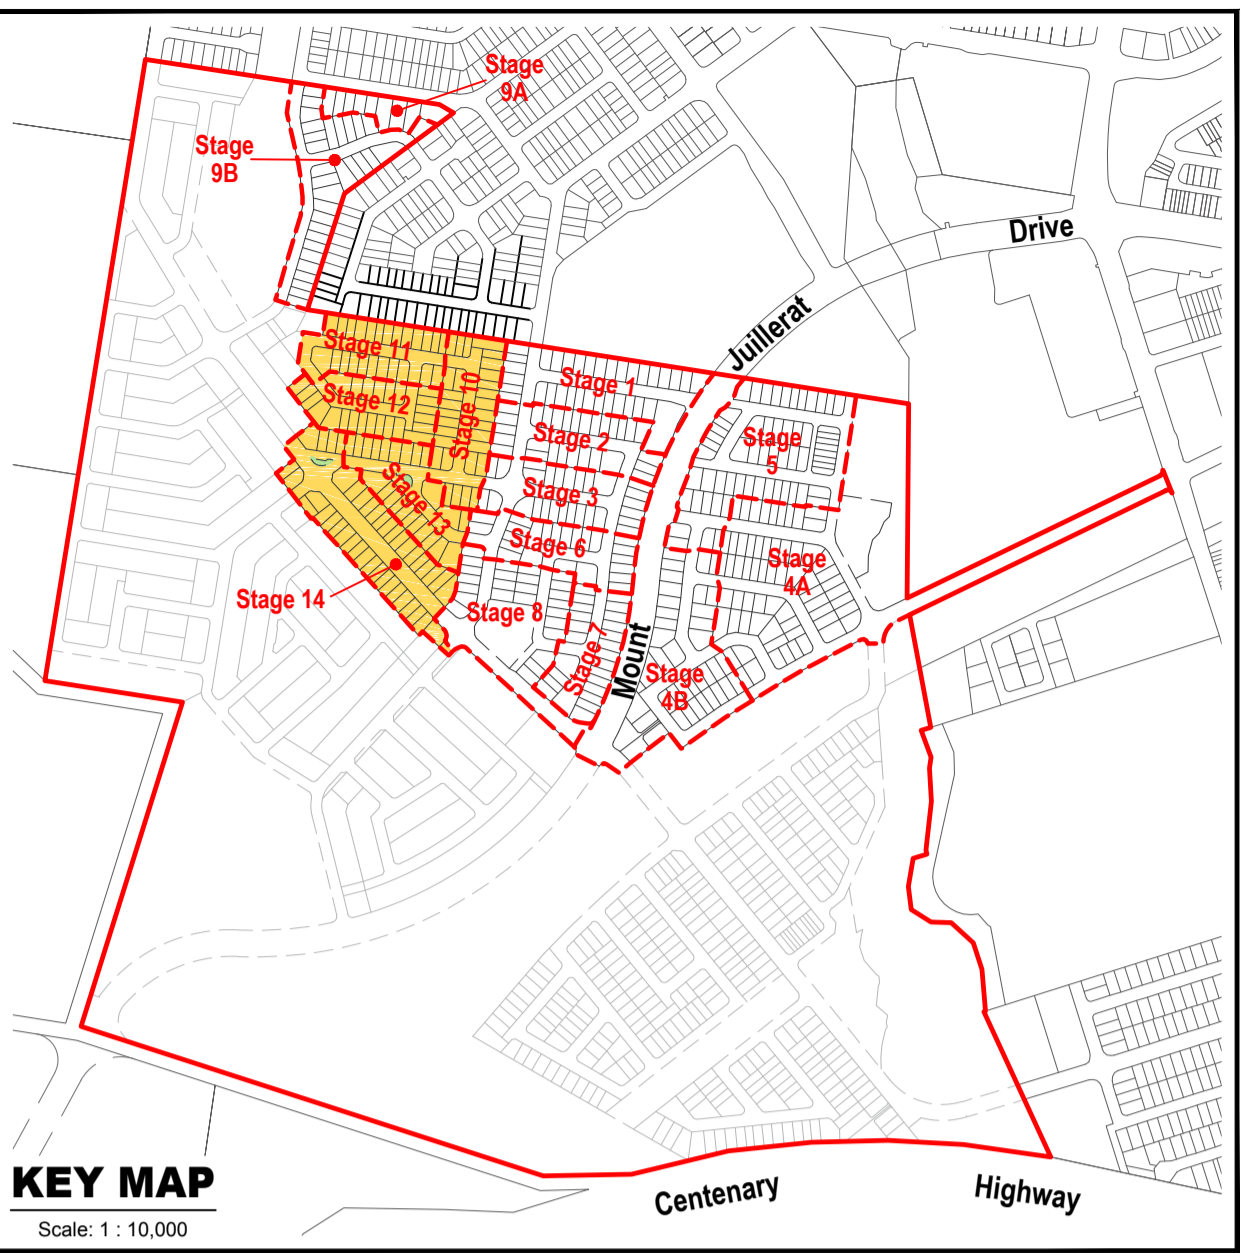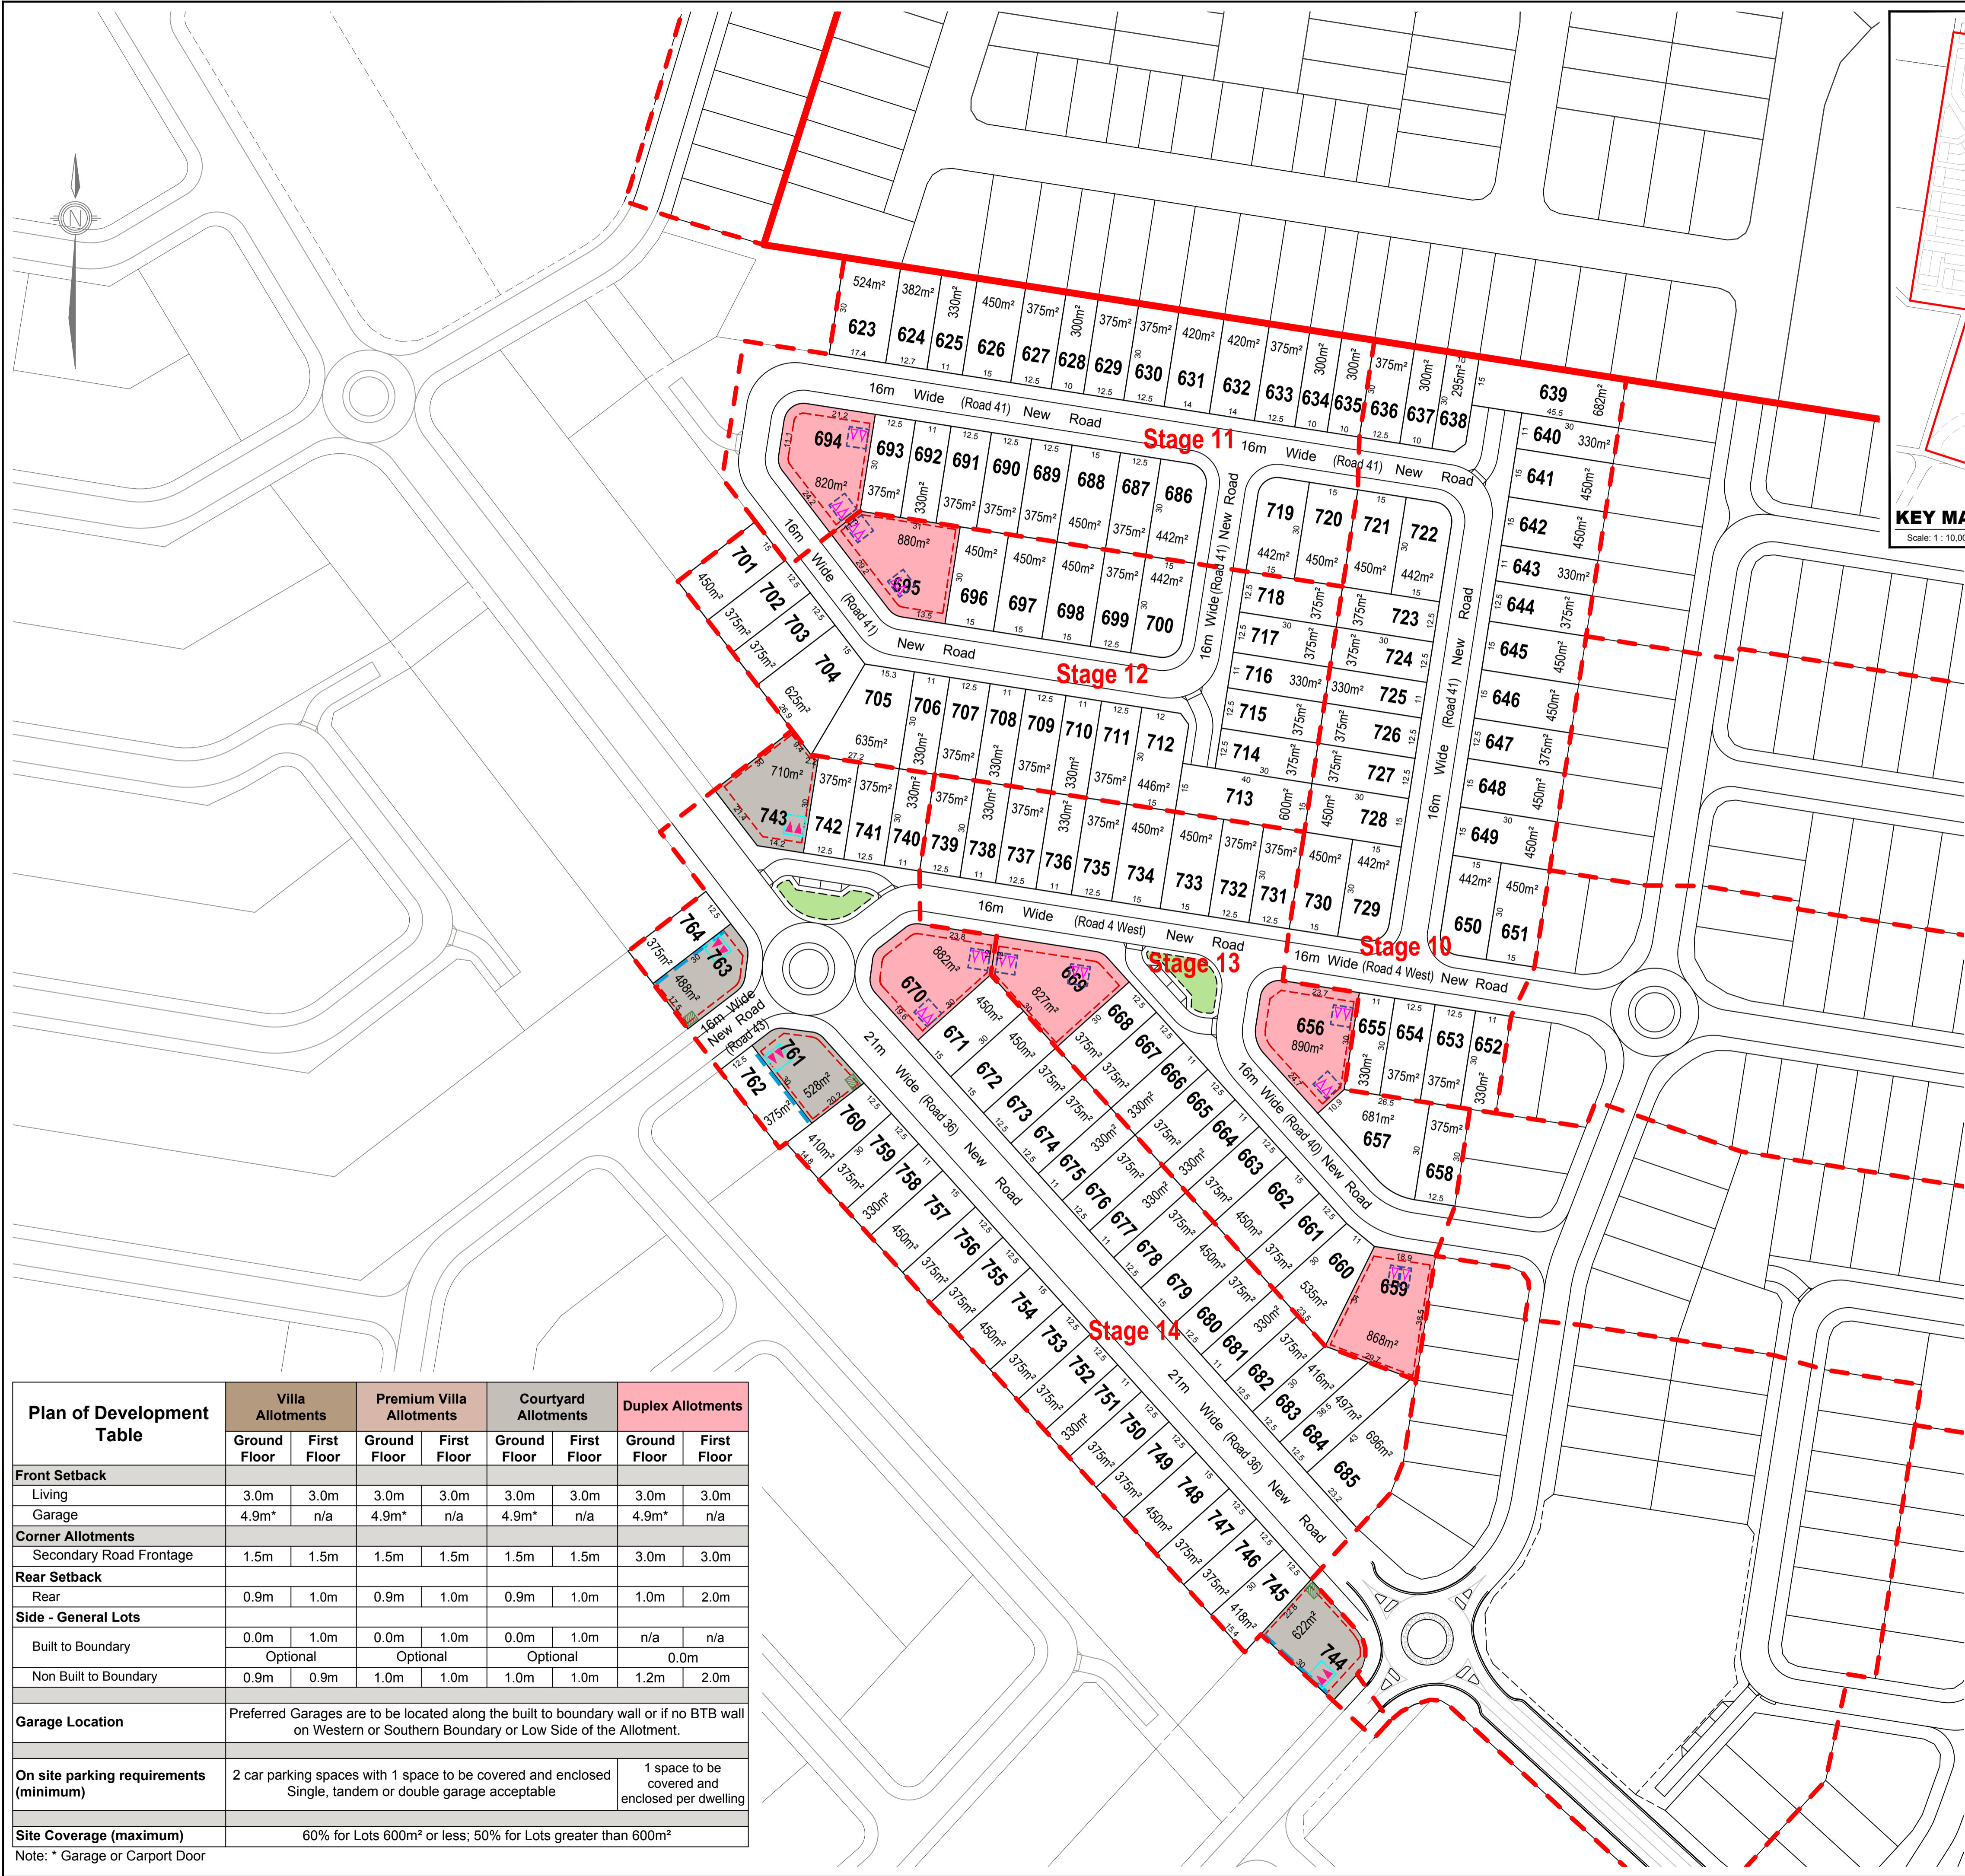

Development Control Notes

General

- All development is to be undertaken in accordance with the Development Approval.
- Building setbacks and built-to-boundary wall locations shown are subject to future proposed easements and/or underground services.
- The maximum height of buildings shall not exceed 8.5m and two (2) storeys, except when existing grades exceed 15% where the building may be up to 10m and 2 storeys in height.
- The maximum site coverage for each lot is to be in accordance with the Plan of Development Table.

Setbacks

- Setbacks are as per the Plan of Development Table unless otherwise specified.
- Setbacks are measured to outer most projection (OMP).
- First floor setbacks must not exceed the minimum ground floor setbacks.
- In the case of corner allotments an additional setback from the street corner is applicable. The setback applies to any building or structure greater than 2m high as follows:
 - In the case of Villa and Premium Villa Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 6m back from the point of intersection of these two boundaries.
 - In the case of Courtyard, Premium Courtyard and Duplex Corner Lots the setback is measured as the line that joins the points on the front and side street boundaries of the lot that are located 9m back from the point of intersection of these two boundaries.
- Where Built to Boundary walls are not adopted side setbacks shall be in accordance with the Plan of Development Table.
- Built to Boundary walls are to have a maximum length of 9 metres and a maximum height of 4.5 metres.
- For lot 638 - 0.9m setback applies to the secondary frontage (eastern boundary).

Outdoor Living Space

- Private outdoor living space, must be provided for each dwelling, not less than 20m² in area with a minimum dimension of 3.0m.

Buildings facing a park or more than one street

- Dwellings on lots with more than one frontage to a public right of way (including a road, bikeways, public footpath or the like) must address all public frontages.

Parking and Driveways

Garages:

- Garages must not project forward of the main facade (front wall) of the dwelling.

- Unless otherwise stated, the garage door or parking structure shall occupy no more than 50% of the street frontage for all lots up to 450m² in area, provided that the garage or parking structure is not located forward of the main building line of the dwelling.

Driveways:

- A maximum of one driveway per dwelling is permitted.
- The maximum width of a driveway where crossing the verge:
 - shall be 3.5m for single garages; and
 - 4.8m for double garages.

Definitions

Site Cover - the total area of the roof of the dwelling expressed as a percentage of the lot area, but which excludes eave overhangs.

Plan of Development Table	Villa Allotments		Premium Villa Allotments		Courtyard Allotments		Duplex Allotments	
	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor	Ground Floor	First Floor
Front Setback								
Living	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m	3.0m
Garage	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a	4.9m*	n/a
Corner Allotments								
Secondary Road Frontage	1.5m	1.5m	1.5m	1.5m	1.5m	1.5m	3.0m	3.0m
Rear Setback								
Rear	0.9m	1.0m	0.9m	1.0m	0.9m	1.0m	1.0m	2.0m
Side - General Lots								
Built to Boundary	0.0m	1.0m	0.0m	1.0m	0.0m	1.0m	n/a	n/a
	Optional		Optional		Optional		0.0m	
Non Built to Boundary	0.9m	0.9m	1.0m	1.0m	1.0m	1.0m	1.2m	2.0m
Garage Location	Preferred Garages are to be located along the built to boundary wall or if no BTB wall on Western or Southern Boundary or Low Side of the Allotment.							
On site parking requirements (minimum)	2 car parking spaces with 1 space to be covered and enclosed Single, tandem or double garage acceptable						1 space to be covered and enclosed per dwelling	
Site Coverage (maximum)	60% for Lots 600m² or less; 50% for Lots greater than 600m²							

Note: * Garage or Carport Door

REVISION
A: 16/02/17 Amend Staging
B: 14/06/17 Amend Layout
C: 12/09/17 Amend Stage 10 & 11 Layout

Note:
All Lot Numbers, Dimensions and Areas are approximate only, and are subject to survey and Council approval.

Dimensions have been rounded to the nearest 0.1 metres.

Areas have been rounded down to the nearest 5m².

The boundaries shown on this plan should not be used for final detailed engineers design.

Source Information:
Site boundaries: Saunders Havill.
Adjoining information: DCDB.
Contours: ETS.

Legend

- Site Boundary
- Proposed Stage Boundary
- Active Open Space
- Drainage Open Space
- Landscaped Entry Statement

Allotment Details

- Preferred Private Open Space Location
- Maximum Building Location Envelope
- Optional Built to Boundary Wall
- No Vehicle Access
- Preferred Garage Location (on Single Family Dwellings)
- Indicative Garage Location (on Multi Family Dwellings - Subject to Design)

Scale 1 : 1000 @ A1
0 5 10 20 30 40 50 60

CLIENT

PEET

PROJECT

EDEN'S CROSSING
Naturally connected

PLAN OF DEVELOPMENT
LOTS SUBJECT TO MCU
STAGES 10 - 14
ALLOTMENT LAYOUT

Date: 12 SEPTEMBER 2017

Comp By: WNW / JC / MD

Checked By: MD

DWG Name: 132030-34 Stages 10-15

Job Ref: 132030

Local Authority: IPSWICH CITY COUNCIL

Locality: REDBANK PLAINS

Scale: 1 : 1000

Sheet: A1

Plan Ref: 132030 - 48

Rev: C

RPS

RPS Australia East Pty Ltd
ACN 140 292 762
ABN 44 140 292 762

Urban Design
Brisbane Design Studio
455 Brunswick Street
Fortitude Valley QLD 4006

T+61 7 3124 9300
F+61 7 3124 9399

W rpsgroup.com.au

© COPYRIGHT PROTECTS THIS PLAN
Unauthorised reproduction or amendment
not permitted. Please contact the author.